


Hitachi motor

HITACHI
Inspire the Next

Premium-Efficiency Motors

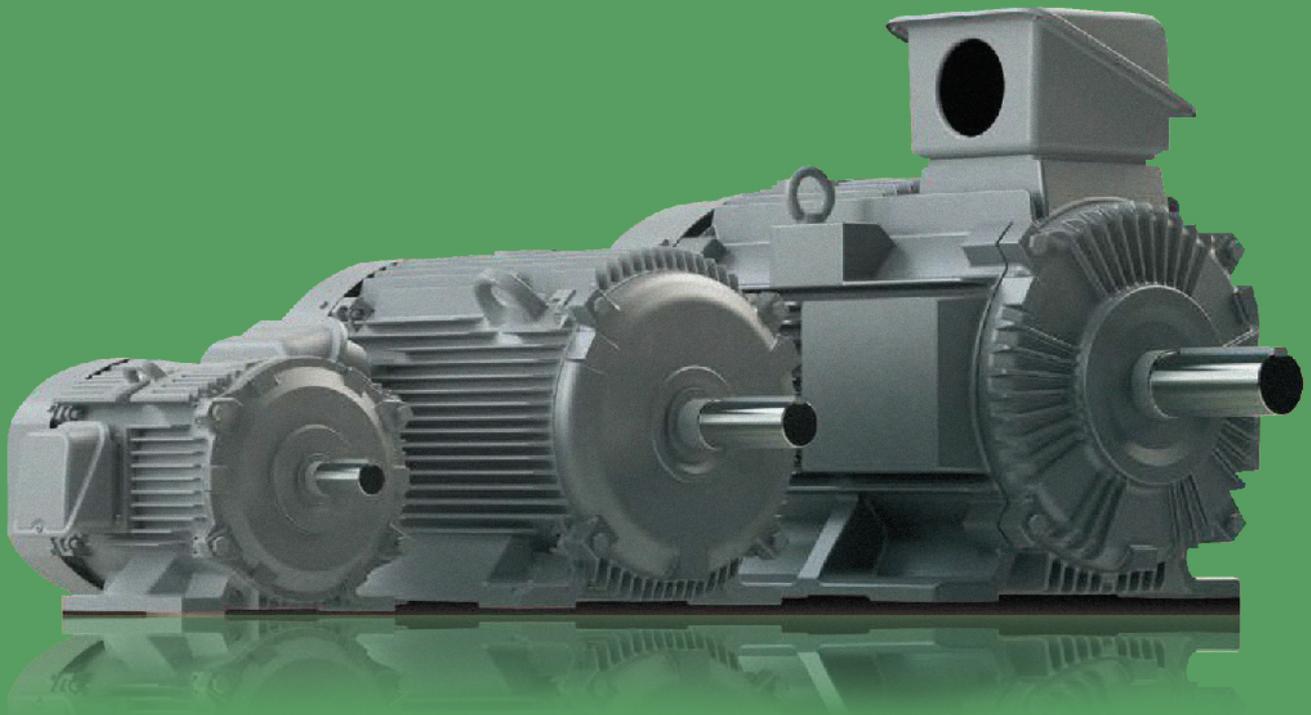

With a century of motor development experience, Hitachi provides a new generational motor.

Main Features :

1. Global standard

- Conformity to JIS C 4213(Japan) [Efficiency class: IEC60034-30 Premium efficiency class (IE3)]

2. Premium-efficiency

- Compare to the standard motors, iron core shape is improved and material quality is raised
- Motor loss is reduced 30~40%
- This improvement realizes higher efficiency when compared with the standard motors

3. Long motor life

- The temperature of stator coil has been decreased at 10~20°C under a rationalization design and a high cooling effect for an electric part
- The coil insulation is achieved two times longer on operation life compared with the standard motor
- The bearings are also 2.5 times longer on operation life
- The operation life changes depending on operation conditions

4. Inverter operation is also available (1:10 or 1:20 constant torque)

- 0.4~1.5kW 4P is available to operate with 1:10(6~60Hz) speed under 100% constant torque operation using the inverters (In case the sensorless vector inverters are used) 1:20(3~60Hz) is also available with special design motors. These motors are adopted durable insulation system with advanced technology.

5. Furthermore benefit


- Low noise and vibration can be realized with advanced technologies

Strengthened compatibility with the global standard

Standard-compatible with protective structure IP 55 and heat-resistant class F

Protective structure IP 55

The conventional “the motor” series employed “IP 44” even for outdoor types. However, “The motor Neo 100” outdoor series employs “IP55” based on the global standard.

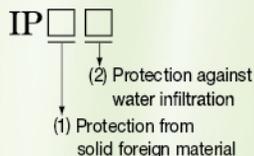

Heat-resistant class F

“The motor Neo100” employs heat-resistant class F (the increase in motor temperature is within the range of heat-resistant classes E and B); the reliability of which has been improved.

Description of the protective structure (conforming to JIS C 4034-5)

Model	(1) Degree of protection from solid foreign material	(2) Degree of housing structure protection against water infiltration
Neo100 (IP55)	5 Rotating machine protected against dust	5 Rotating machine protected against fountain flow
Conventional (IP44)	4 Rotating machine protected against solid foreign material in excess of 1 mm	4 Rotating machine protected against splashes

Heat-resistant class	A	E	B	F	H
Limit of temperature rise*	60°C	75°C	80°C	105°C	125°C

* : A temperature which rises by 40°C or more is prescribed when the ambient temperature is supposed to be 40°C.

Circumferences of the spray test (Degree of housing structure protection against water infiltration)



(Reference) IP44 spray test
Rotating machine protected against splashes




IP55 spray test
Rotating machine protected against fountain flow

6. Operational cost saving

- Considering the operational cost under long term period, the best idea is to adopt the Premium efficiency motors
- The point is just not to consider the initial cost of motor but overall cost including long term operation







Example	
Voltage/Frequency	380V/50Hz
Operating Condition	4,800 hr. (16hr./Day / 300Day)
Electricity Power rate	4.57 THB

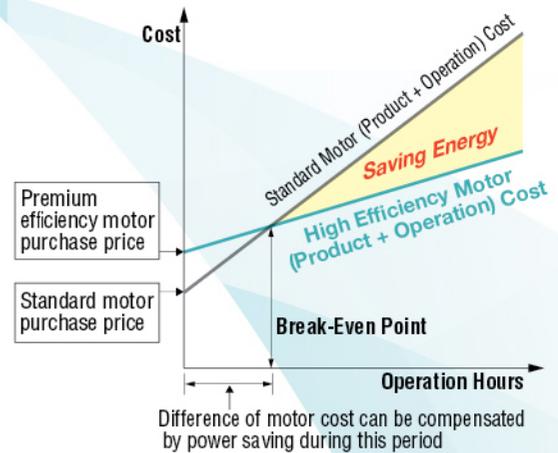

The energy saving effect of the top Runner motor is

$$= \text{Output (kW)} \times \text{Operation hour (Hour/year)} \times \text{Power charge cost (Cost/kWh)} \times \left(\frac{100}{\text{Standard Motor efficiency(\%)}} - \frac{100}{\text{Premium efficiency motor efficiency(\%)}} \right)$$

Annual Power Saving Charge total: 95,736 BAHT (Total when using each motor)

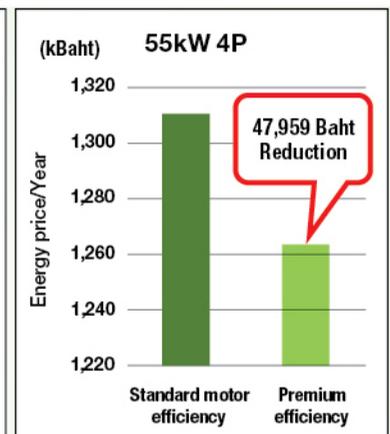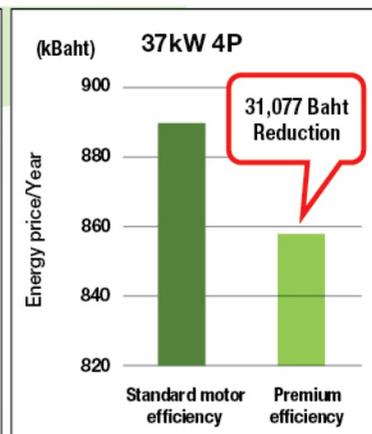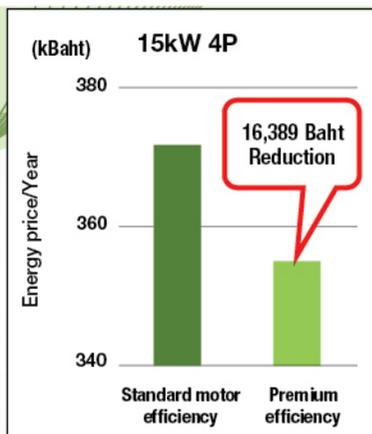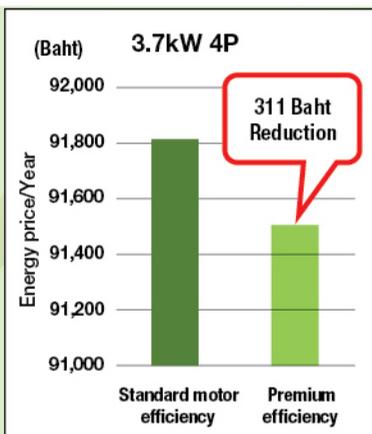

What is an Efficient Motor?

Meaning of Efficient Motor is motor with a high ratio of effective output to input (efficiency).

$$\text{Efficiency(\%)} = \frac{\text{output}}{\text{input}} \times 100 = \frac{\text{output}}{\text{output} + \text{loss}} \times 100$$

What is different from a standard motor?

1) The use of high-grade electrical steel sheets, the increase in the cross-sectional area of conductors, and the electrical design dedicated to the effect rate is made to increase the effect rate.

2) Compared to standard motors, losses are reduced by 30-40%, resulting in a 2-10% improvement in efficiency.

Types of Motor Losses

1) Mechanical Loss : It consists of friction loss of bearings, windage of cooling fans, and depends on the rotation speed

2) Core Loss : It is generated by a change in the magnetic field in the iron core. It depends on the magnetic flux density of the iron core and the power frequency.

3) Copper Loss (Primary copper loss, secondary copper loss) : It is generated by the flow of electric current through a Conductor (copper, aluminum) that has resistance. Depends on the current value and the resistance value of the conductor.

4) Stray Load Loss : Losses other than those listed above

Hitachi Top Runner motors (0.75-132kW) meet the IE3 (Premium Efficiency) efficiency values of JIS C 4034-30 at 200V50Hz, 200/220/230 60HZ (400V 50Hz, 400/440/460 60 Hz).

Product specifications

Item		Specifications	
Standard		JIS C 4213 (Efficiency classes: JIS C 4034-30:2011 Premium efficiency class (IE3))	
Construction		Totally enclosed fan-cooled types (Indoor and outdoor types)	
Model	Foot mount	Indoor type	TFO-LK(0.75~3.7kW), TFO-LKK(5.5kW~)
		Outdoor type	TFOA-LK(0.75~3.7kW), TFOA-LKK(5.5kW~)
	Flange mount	Indoor type	VTFO-LK(0.75~3.7kW), VTFO-LKK(5.5kW~)
		Outdoor type	VTFOA-LK(0.75~3.7kW), VTFOA-LKK(5.5kW~)
Output	2 Poles	0.75~132kW	
	4 Poles	0.75~132kW	
	6 Poles	0.75~110kW	
Heat-resistant class		155 (F *1)	
Rating		S1 (Continuous)	
Protection		Indoor types: IP44 Outdoor types: IP55	
Voltage/Frequency		220/380V or 380/415V 50Hz 2Poles 22kW~, 4Poles 18.5kW~, 6Poles 15kW~ 200V 50/60Hz, 220/230V 60Hz 400V 50/60Hz, 440/460V 60Hz	
Lead wire construction		Lug connection: 2 Poles 22kW~, 4 Poles 18.5kW~, 6 Poles 15kW~ ※ 5.5kW~ Available Y-Δ starting	
Number of lead wires		6:(5.5kW~) 12: 2 Poles 22kW~, 4 Poles 18.5kW~, 6 Poles 15kW~	
Painting color		Rigail gray (munsell 8.9Y 5.1/0.3)	
Transmission system		2Poles 11kW~: Direct coupling only 2Poles ~7.5kW and all of 4 Poles~: Direct or belt coupling	
Rotation		Clockwise when viewed from the anti-load side	
Environment	Temperature	-30~40°C	
	Humidity	95%RH or less	
	Altitude	1,000m or less	
Atmosphere		No corrosive gas, no explosive gas, no steam, no dew condensation, and little dust	

Note : Request a dimensional drawing to us for design use because the specifications may be subject to change.
 *1 Temperature rise : Frame size 112M or less class E, Frame size 132S~180M class B

The Wiring Connection and Driving Direction

Circuit Diagram for the use of motor wiring connection

0.4-3.7kW/6-wire 220/380V

Connect to power source to start-up

Direct on Line Start

5.5-30kW/6-wire 380/415V

Connect to power source to start-up or star

Direct on Line Start

Star-Delta Start

37-55kW/12-wire 200/380/400V

Connect to power source to start-up or star

Direct on Line Start

400V Class


200V Class

Star-Delta Start

400V Class

200V Class

Driving Direction

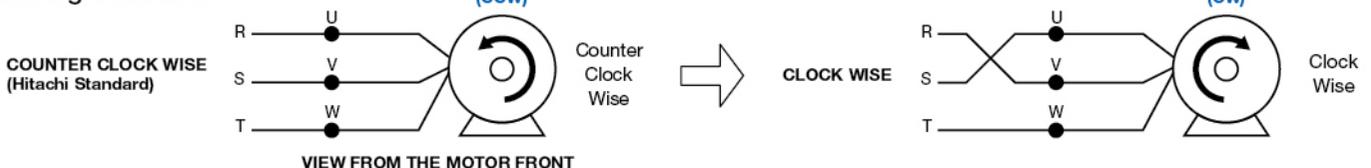

How to order the motors.

Model indication (Example):

xx HP (or kW) TFO-LK(LKK) x P IP55 + Voltage/Hz + Optional Spec.

|
|
|

Output
Type
No of pole

Please specify the model indication upon your inquiry when request.

Example : 3HP (or 2.2kW), 4pole, Foot Mount, Protection class IP55, Voltage 380V 50Hz

For new installation

3HP (or 2.2kW) TFO-LK 4P IP55 380V 50Hz


For replacement

3HP (or 2.2kW) TFO-LK 4P IP55 380V 50Hz + **MFG No.**

MFG No. (Manufacturing No.) is also need to check specifications

Model Explanation

Three-Phase

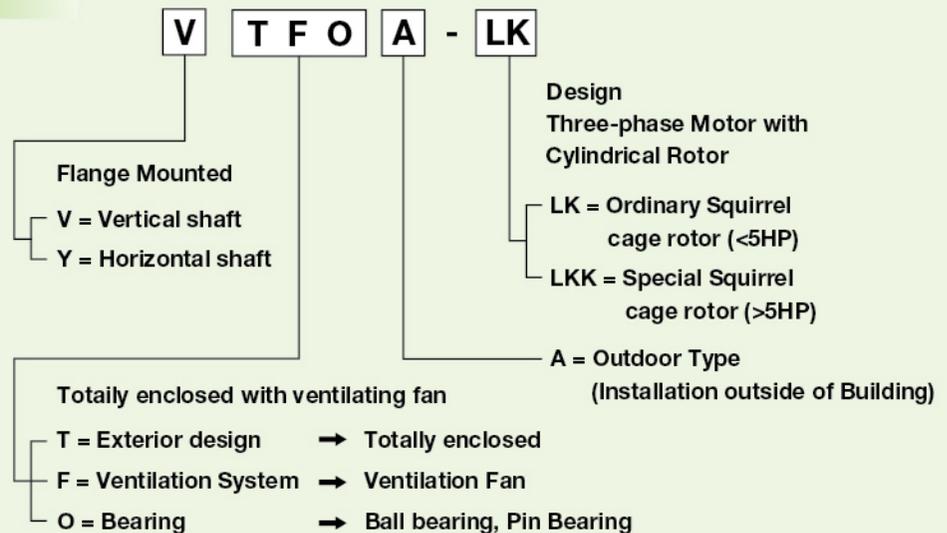


kW and HP comparable table

HP	1	2	3	5	7.5	10	15	20	25	30	40	50	60	75	100	120	150	175
kW	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90	110	132

Dimensions

Indoor types (IP44) / Foot mount

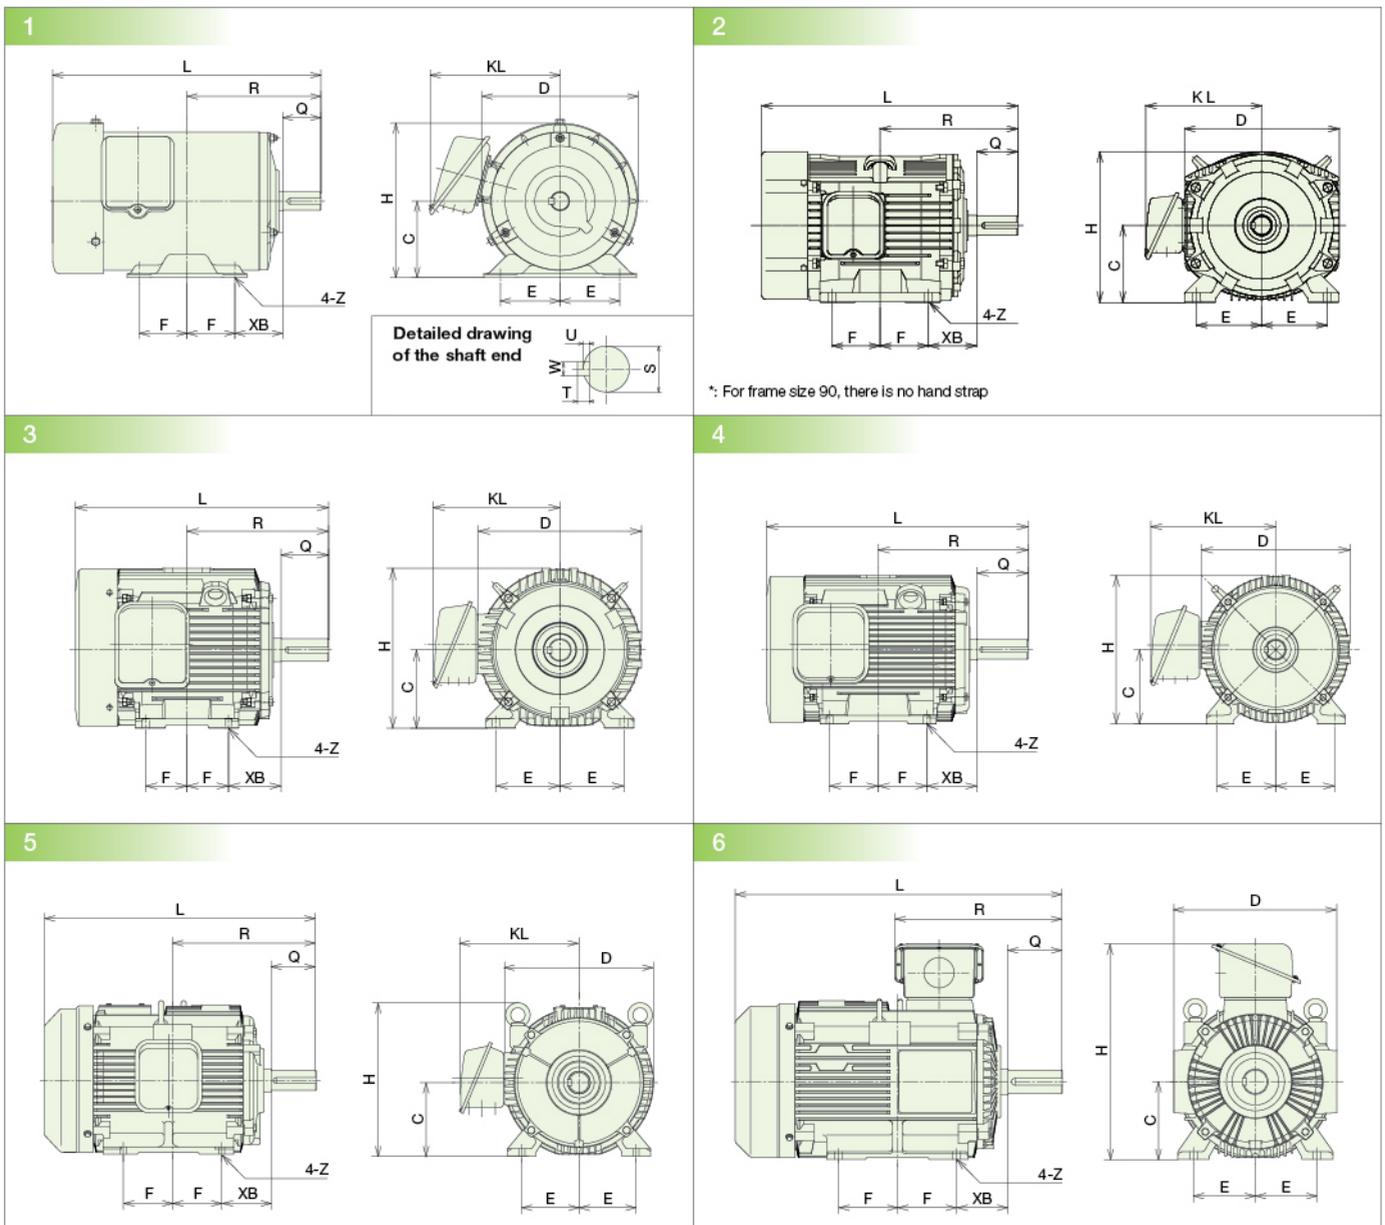


- Mounting dimensions are compatible with IE1 class standard models.
- Request an official dimensional drawing to sales office for your design purpose because the dimensions might be subject to change without any notice.

Frame size	Output (kW)			Fig. No.	Dimensions (mm)														Approx. weight (kg)			
	2 Poles	4 Poles	6 Poles		L	R	D	KL	H	C	F	E	Z	XB	S	W	U	T	Q	2 Poles	4 Poles	6 Poles
80M	0.75	—	—	1	268.5	140	163	135	161.5	80 ⁰ _{-0.5}	50	62.5	10x25	50	19j6	6	3.5	6	40	12	—	—
	—	0.75	—		280.5															—	14	—
90L	1.5	1.5	0.75	2	315	168.5	182	149	178	90 ⁰ _{-0.5}	62.5	70	10	56	24j6	8	4	7	50	17	19	20.5
	2.2				20.5															—	—	
100L	—	2.2	1.5	3	356	193	198	156	197.5	100 ⁰ _{-0.5}	70	80	12	63	28j6	8	4	7	60	—	28.5	31
112M	3.7	3.7	2.2		372	200	225	169	219.5	112 ⁰ _{-0.5}	70	95	12	70	28j6	8	4	7	60	34	37	40
132S	5.5	5.5	3.7	3	427.5	239	276	212	270	132 ⁰ _{-0.5}	70	108	12x14	89	38k6	10	5	8	80	45	56	50
132M	—	7.5	5.5		465.5	258	276	212	270	132 ⁰ _{-0.5}	89	108	12x14	89	38k6	10	5	8	80	50	63	62
160M	11	11	7.5	4	563	323	320	269	320	160 ⁰ _{-0.5}	105	127	14.5x16.5	108	42k6	12	5	8	110	90	91	83
160L	18.5	15	11		595	345	320	269	320	160 ⁰ _{-0.5}	127	127	14.5x16.5	108	42k6	12	5	8	110	102	108	103
180M	22	18.5	15	5	665	351.5	365	290	375	180 ⁰ _{-0.5}	120.5	139.5	14.5	121	48k6	14	5.5	9	110	180	190	180
	—	22			200	200																
180L	30	30	18.5	6	738	370.5	365	—	505	180 ⁰ _{-0.5}	139.5	139.5	14.5	121	55m6	16	6	10	110	200	230	200
	—	—	22		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
200LB	37	—	—	6	814	395.5	—	—	556	200 ⁰ _{-0.5}	152.5	159	18.5	133	55m6	16	6	10	110	290	—	—
	45	—	—		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	315	—	—
200L	—	37	30	6	844	425.5	420	—	556	200 ⁰ _{-0.5}	152.5	159	18.5	133	60m6	18	7	11	140	—	320	310
	—	45	37		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	325	335
225SB	55	—	—	6	821	402	470	—	606	225 ⁰ _{-0.5}	143	178	18.5	149	55m6	16	6	10	110	365	—	—
225S	—	55	45		851	432	—	—	606	225 ⁰ _{-0.5}	143	178	18.5	149	65m6	18	7	11	140	—	400	410

- Note : Mounting dimensions are the conventional products and compatibility.
 Note : Request a dimensional drawing to us for design use because the dimensions may be subject to change.

Indoor types (IP44) / Foot mount

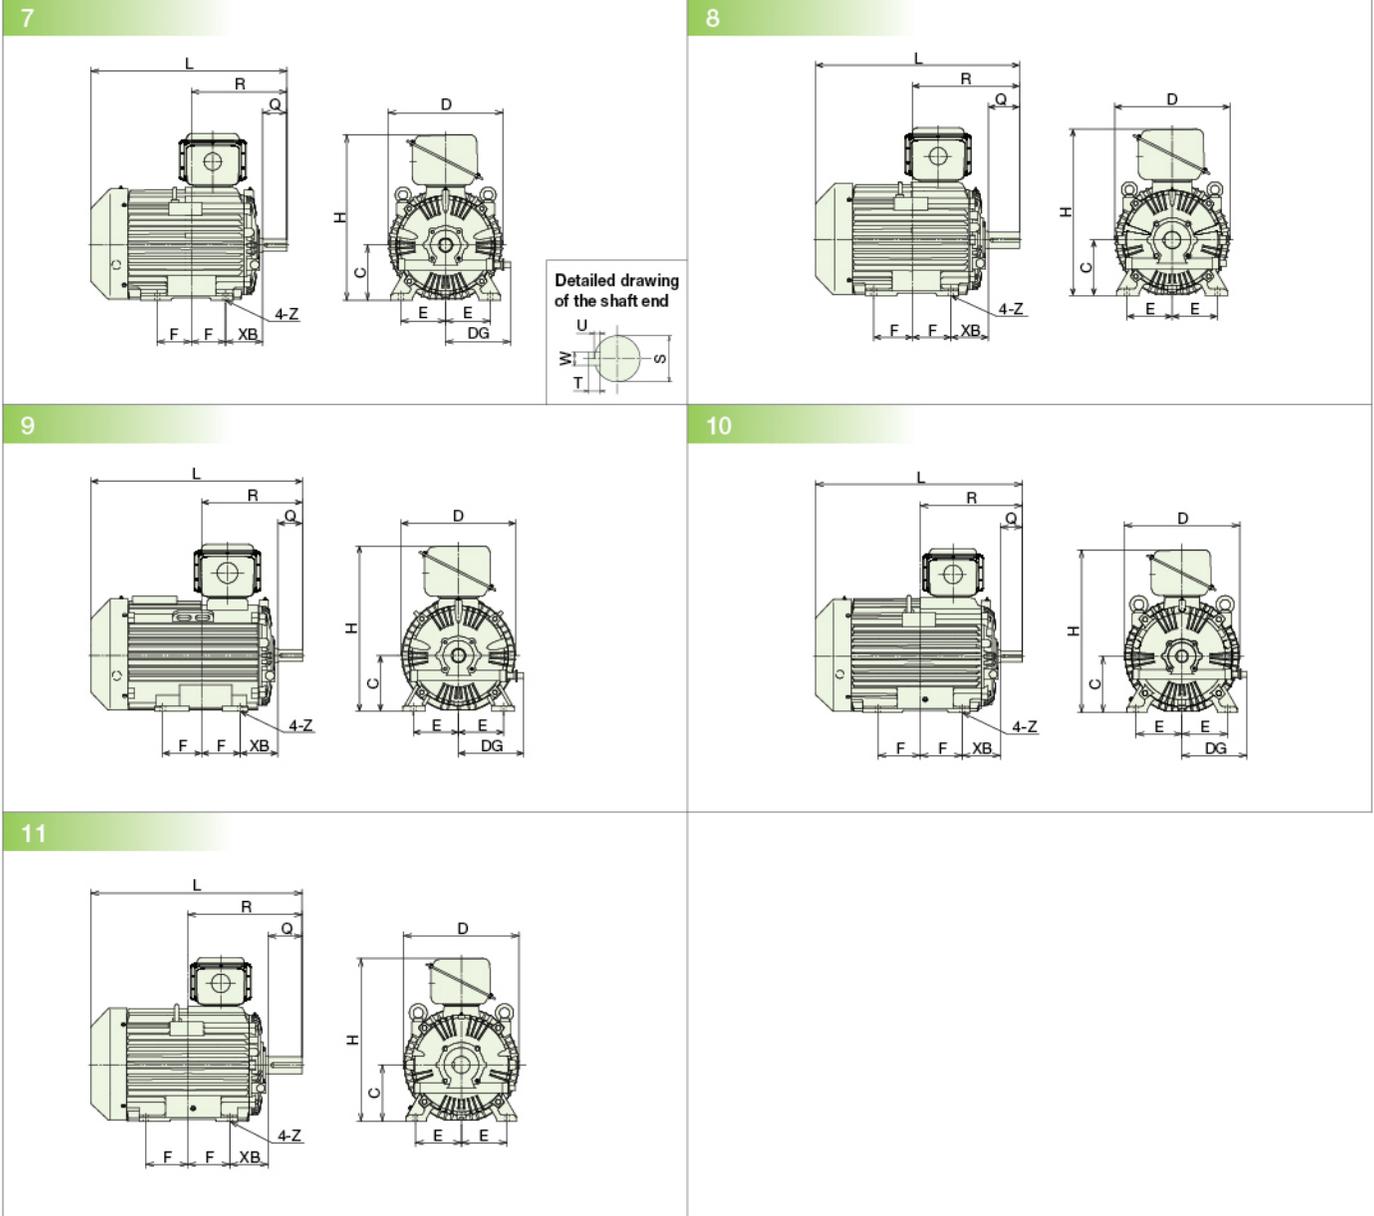


Frame size	Output (kW)			Fig. No.	Dimensions (mm)															Approx. weight (kg)		
	2 Poles	4 Poles	6 Poles		L	R	D	DG	H	C	F	E	Z	XB	S	W	U	T	Q	2 Poles	4 Poles	6 Poles
250SB	75	—	—	7	888	433.5	520	294	750	250 ⁰ _{-0.5}	155.5	203	24	168	55m6	16	6	10	110	545	—	—
250S	—	75	55	8	918	463.5	520	—	750	250 ⁰ _{-0.5}	155.5	203	24	168	75m6	20	7.5	12	140	—	535	525
250MB1	90	—	—	9	948	452.5	513	294	743	250 ⁰ _{-0.5}	174.5	203	24	168	55m6	16	6	10	110	550	—	—
250M	—	90	75	8	918	482.5	520	—	750	250 ⁰ _{-0.5}	174.5	203	24	168	75m6	20	7.5	12	140	—	560	585
280SB	110	—	—	10	993	484	575	324	810	280 ⁰ _{-1.0}	184	228.5	24	190	55m6	16	6	10	110	720	—	—
280S	—	110	90	11	1053	544	575	—	810	280 ⁰ _{-1.0}	184	228.5	24	190	85m6	22	9	14	170	—	775	790
280MB1	132	—	—	10	1031	509.5	575	324	810	280 ⁰ _{-1.0}	209.5	228.5	24	190	55m6	16	6	10	110	815	—	—
280M	—	132	—	11	1053	569.5	575	—	810	280 ⁰ _{-1.0}	209.5	228.5	24	190	85m6	22	9	14	170	—	825	—
280M1	—	—	110		1091	569.5	575	—	810	280 ⁰ _{-1.0}	209.5	228.5	24	190	85m6	22	9	14	170	—	—	880

Note : Mounting dimensions are the conventional products and compatibility.

Note : Request a dimensional drawing to us for design use because the dimensions may be subject to change.

Dimensions


Outdoor types (IP55) / Foot mount

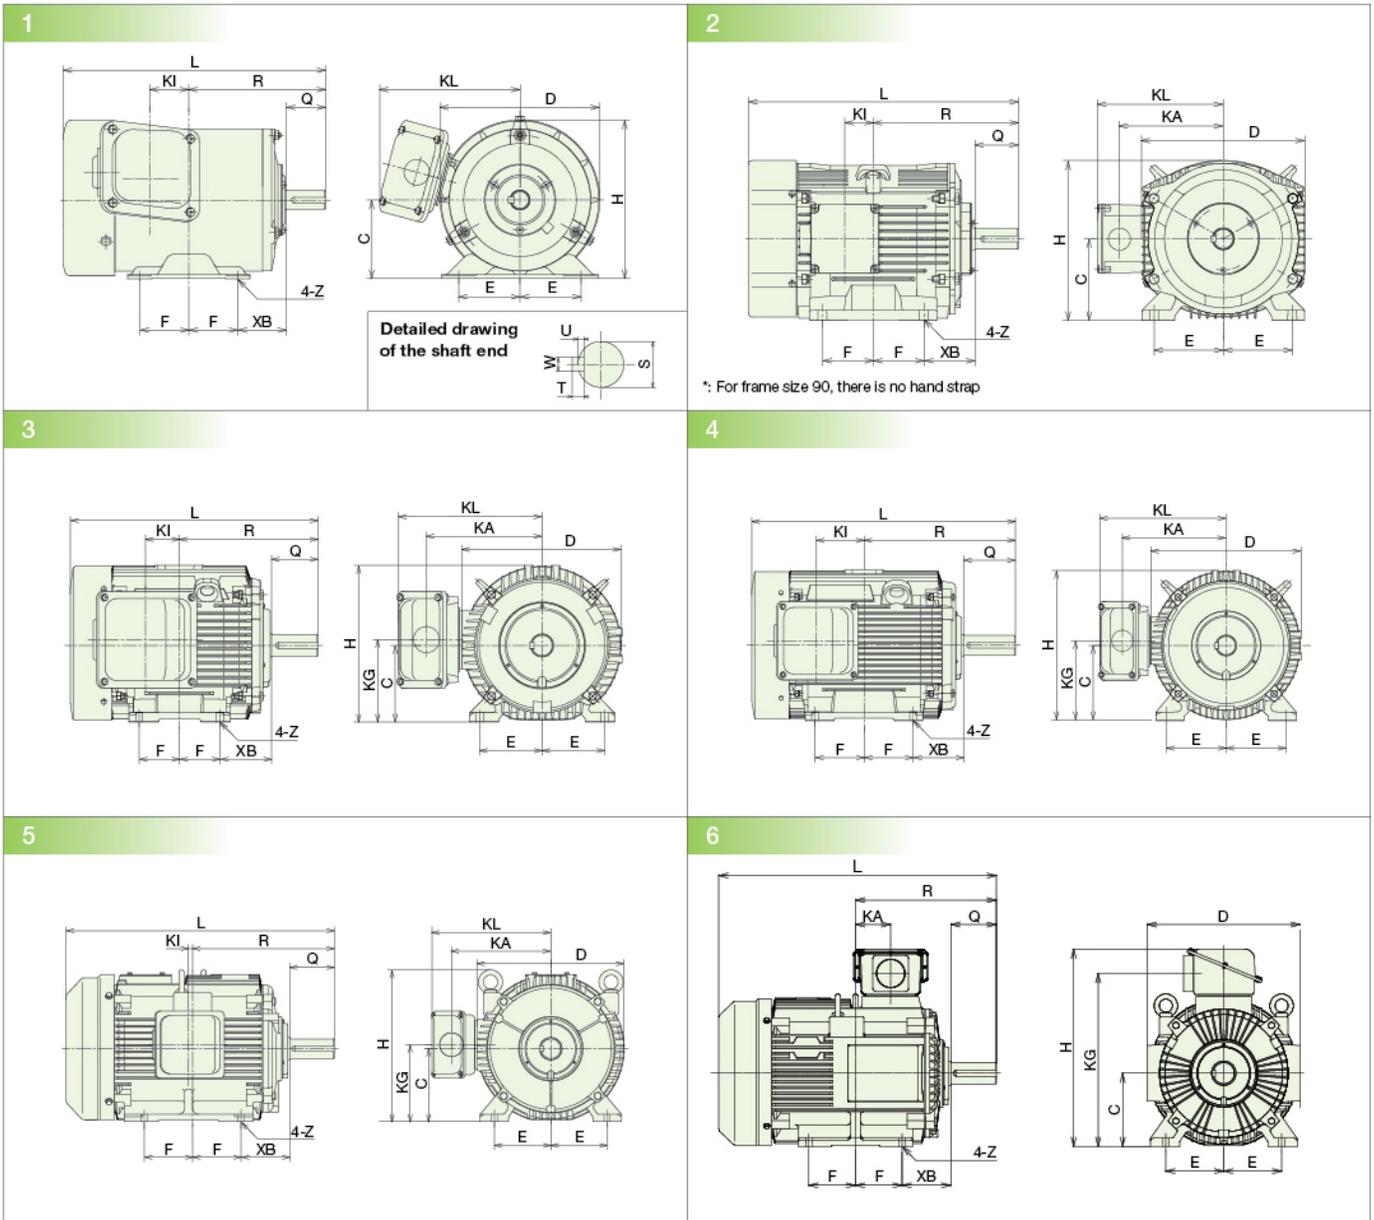

Frame size	Output (kW)			Fig. No.	Dimensions (mm)																Approx. weight (kg)				
	2 Poles	4 Poles	6 Poles		L	R	D	KL	KA	KG	KI	H	C	F	E	Z	XB	S	W	U	T	Q	2 Poles	4 Poles	6 Poles
80M	0.75	—	—	1	268.5	140	163	144	—	—	39.5	161.5	80	50	62.5	10x25	50	19j6	6	3.5	6	40	12.5	—	—
	—	0.75	—		280.5	—	—	—	—	—	51.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—
90L	1.5	—	—	2	315	168.5	182	153	123	—	20	178	90	62.5	70	10	56	24j6	8	4	7	50	17.5	19.5	21
	2.2	1.5	0.75		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	21	—	—
100L	—	2.2	1.5	3	356	193	198	160	130	—	32	197.5	100	70	80	12	63	28j6	8	4	7	60	—	29	31.5
112M	3.7	3.7	2.2		372	200	225	173	143	—	39	219.5	112	70	95	12	70	28j6	8	4	7	60	34.5	37.5	40.5
132S	5.5	—	—	4	427.5	239	276	248	199.5	142	59	270	132	70	108	12x14	89	38k6	10	5	8	80	46	57	51
132M	7.5	5.5	3.7		465.5	258	276	248	199.5	142	78	270	132	89	108	12x14	89	38k6	10	5	8	80	51	—	63
160M	11	—	—	5	563	323	320	270	221.5	170	102	320	160	105	127	14.5x16.5	108	42k6	12	5	8	110	91	92	84
160L	15	11	7.5		595	345	320	270	221.5	170	112	320	160	127	127	14.5x16.5	108	42k6	12	5	8	110	92	—	84
180M	18.5	15	11	6	665	351.5	365	295	246.5	190	10	375	180	120.5	139.5	14.5	121	48k6	14	5.5	9	110	185	195	185
180L	22	18.5	15		665	351.5	365	295	246.5	190	10	375	180	120.5	139.5	14.5	121	48k6	14	5.5	9	110	185	205	185
200LB	37	—	—	7	738	370.5	365	—	102.5	430	—	505	180	139.5	139.5	14.5	121	55m6	16	6	10	110	205	235	205
	45	—	—		814	395.5	420	—	107.5	481	—	556	200	152.5	159	18.5	133	55m6	16	6	10	110	295	—	225
200L	—	37	30	8	844	425.5	—	—	107.5	481	—	—	200	152.5	159	18.5	133	60m6	18	7	11	140	—	325	315
225SB	—	45	37		844	425.5	—	—	107.5	481	—	—	—	200	152.5	159	18.5	133	60m6	18	7	11	140	—	330
225S	55	—	—	9	821	402	470	—	108	531	—	606	225	143	178	18.5	149	55m6	16	6	10	110	370	—	—
225S	—	55	45		851	432	—	—	108	531	—	606	225	143	178	18.5	149	65m6	18	7	11	140	—	405	415

Note : Mounting dimensions are the conventional products and compatibility.
 Note : Request a dimensional drawing to us for design use because the dimensions may be subject to change.

Outdoor types (IP55) / Foot mount

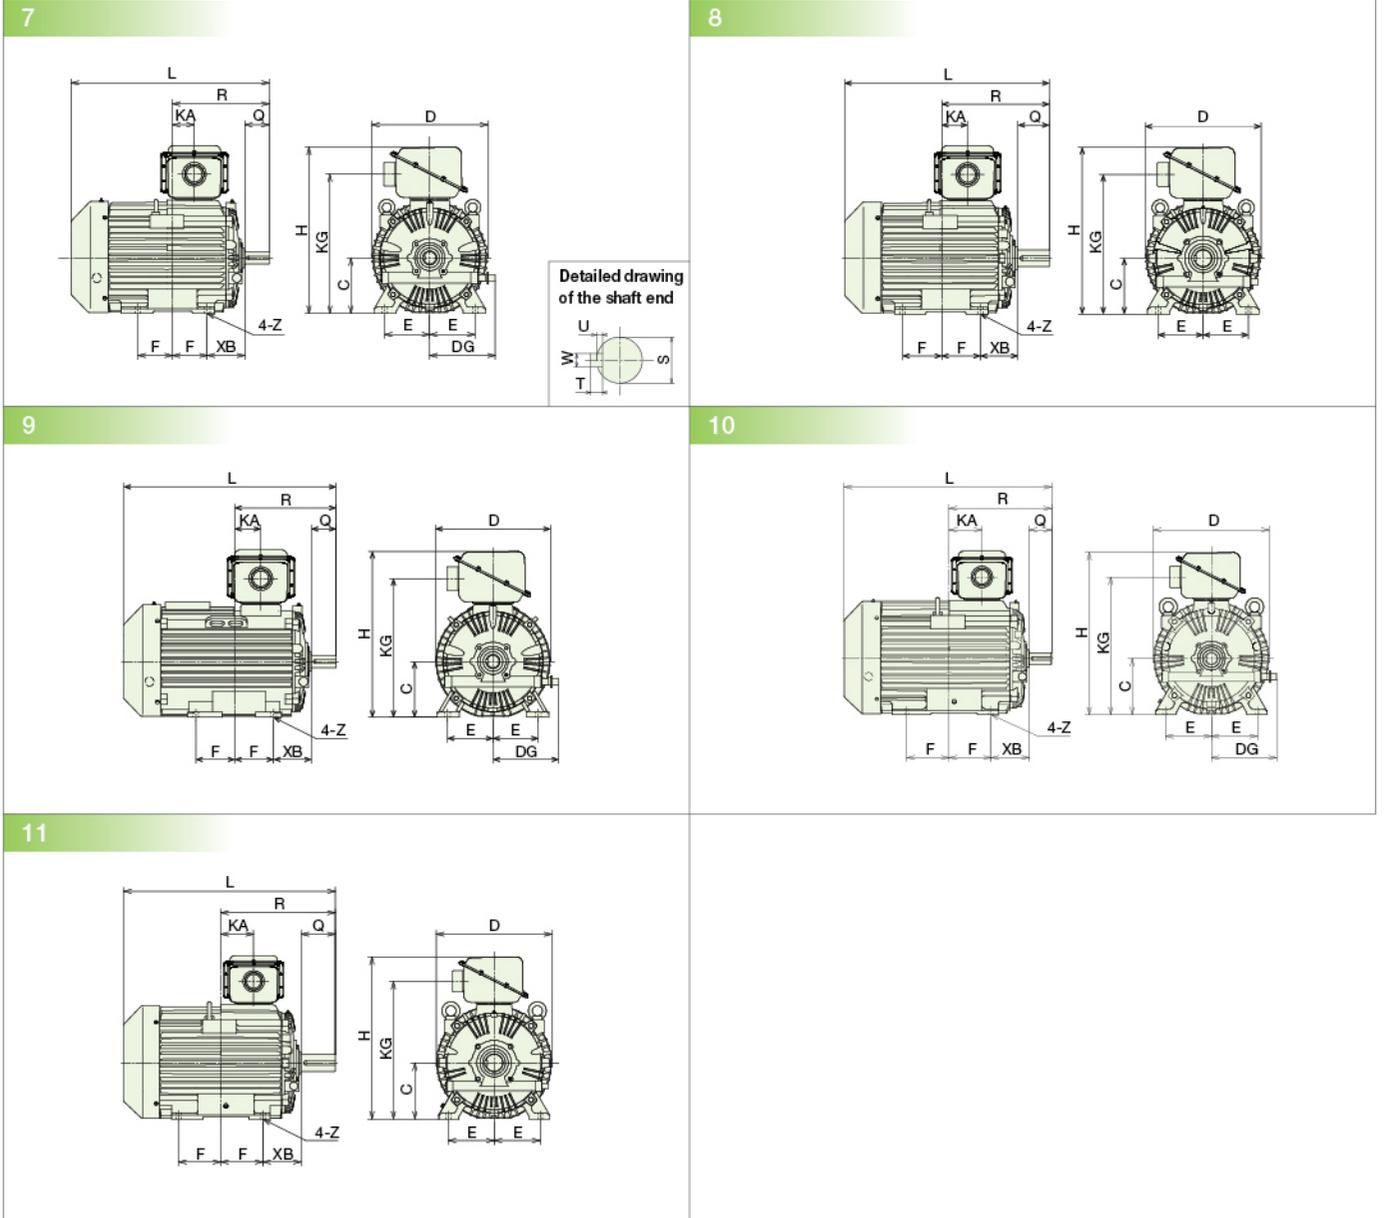


Frame size	Output (kW)			Fig. No.	Dimensions (mm)																	Approx. weight (kg)		
	2 Poles	4 Poles	6 Poles		L	R	D	DG	KA	KG	H	C	F	E	Z	XB	S	W	U	T	Q	2 Poles	4 Poles	6 Poles
250SB	75	—	—	7	888	433.5	520	294	97.5	626	748	250 ⁰ _{-0.5}	155.5	203	24	168	55m6	16	6	10	110	550	—	—
250S	—	75	55	8	918	463.5	520	—	97.5	626	748	250 ⁰ _{-0.5}	155.5	203	24	168	75m6	20	7.5	12	140	—	540	530
250MB1	90	—	—	9	948	452.5	513	294	116.5	621	743	250 ⁰ _{-0.5}	174.5	203	24	168	55m6	16	6	10	110	555	—	—
250M	—	90	75	8	918	482.5	520	—	116.5	626	748	250 ⁰ _{-0.5}	174.5	203	24	168	75m6	20	7.5	12	140	—	565	590
280SB	110	—	—	10	993	484	575	324	138	686	808	280 ⁰ _{-1.0}	184	228.5	24	190	55m6	16	6	10	110	725	—	—
280S	—	110	90	11	1053	544	575	—	138	686	808	280 ⁰ _{-1.0}	184	228.5	24	190	85m6	22	9	14	170	—	780	795
280MB1	132	—	—	10	1031	509.5	575	324	163.5	686	808	280 ⁰ _{-1.0}	209.5	228.5	24	190	55m6	16	6	10	110	820	—	—
280M	—	132	—	11	1053	569.5	575	—	163.5	686	808	280 ⁰ _{-1.0}	209.5	228.5	24	190	85m6	22	9	14	170	—	830	—
280M1	—	—	110		1091	569.5	575	—	163.5	686	808	280 ⁰ _{-1.0}	209.5	228.5	24	190	85m6	22	9	14	170	—	—	885

Note : Mounting dimensions are the conventional products and compatibility.

Note : Request a dimensional drawing to us for design use because the dimensions may be subject to change.

Dimensions

Indoor types (IP44) / Flange mount

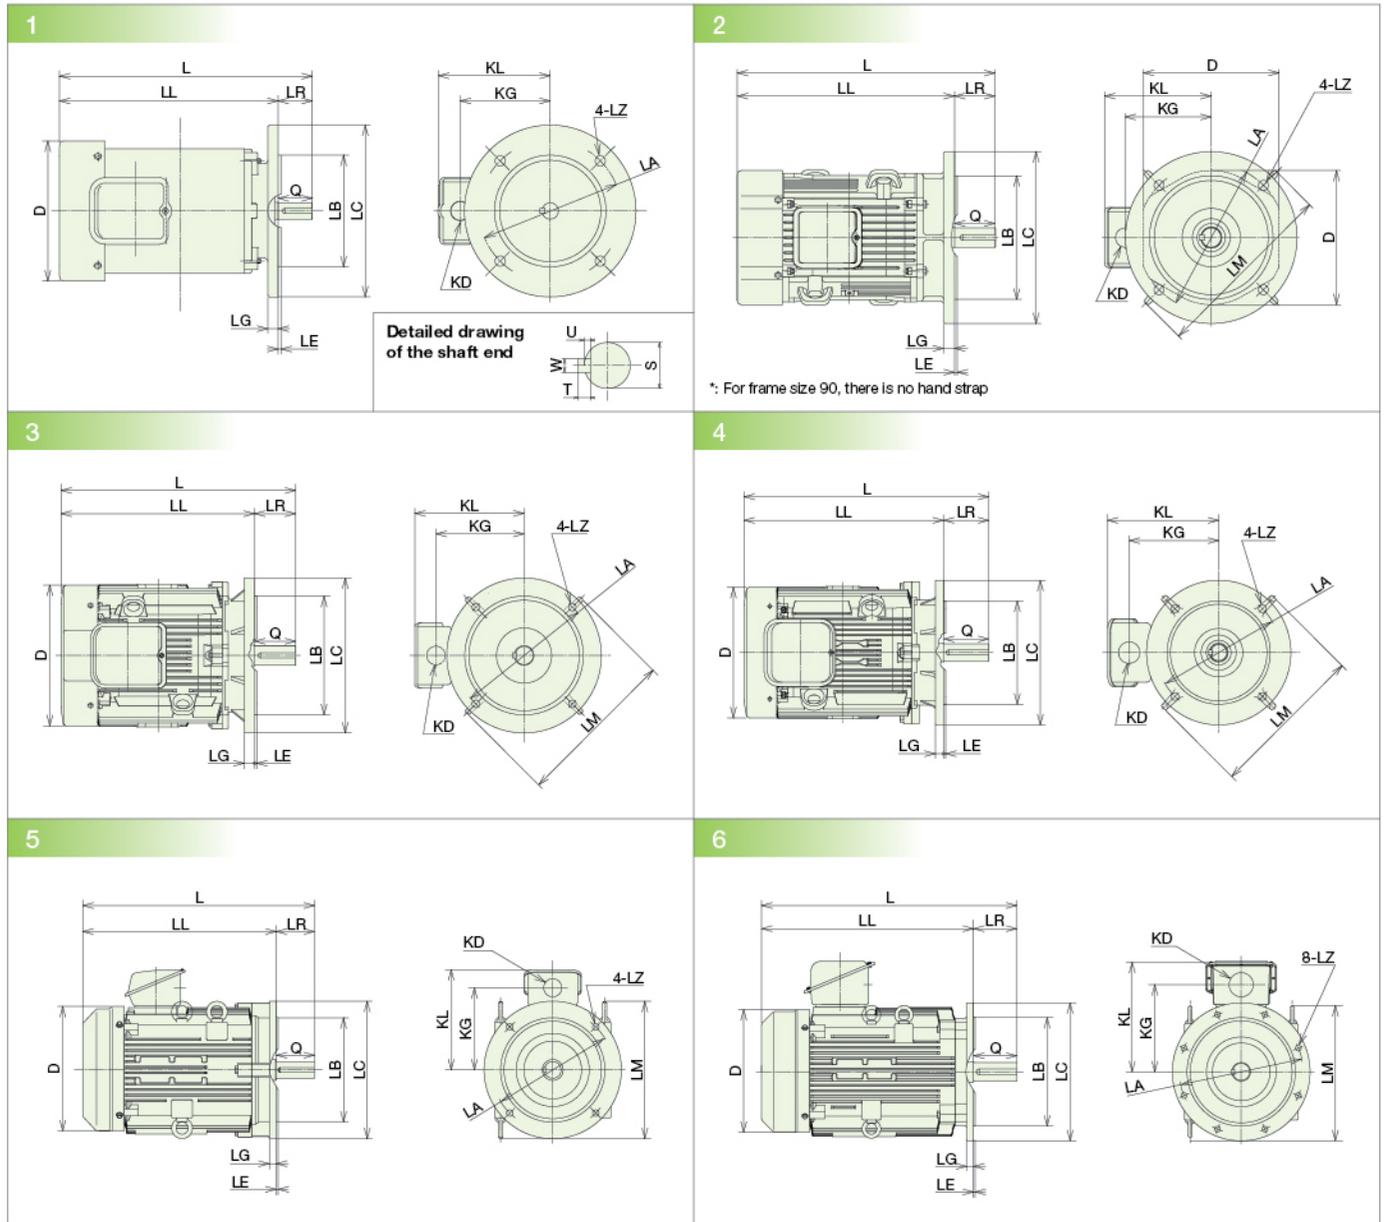


Frame size	Output (kW)			Fig. No.	Dimensions (mm)																	Approx. weight (kg)			
	2 Poles	4 Poles	6 Poles		LA	LB	LC	LE	LG	LZ	D	L	LL	KL	KG	LM	LR	S	W	U	T	Q	2 Poles	4 Poles	6 Poles
80M	0.75	—	—	1	165	130j6	200	3.5	12	12	163	283	243	131	105	—	40	19j6	6	3.5	6	40	14.5	—	—
	—	0.75	—		—	—	—	—	—	—	—	295	255	—	—	—	—	—	—	—	—	—	—	16.5	—
90L	1.5	1.5	0.75	2	165	130j6	200	3.5	12	12	182/176	336	286	148.5	118.5	213	50	24j6	8	4	7	50	20	22	23.5
	2.2	—	—		—	—	—	—	—	—	—	198/195	376.5	316.5	155.5	125.5	270	60	28j6	8	4	7	60	—	33.5
100L	—	2.2	1.5	3	215	180j6	250	4	16	14.5	225/215	397.5	337.5	168.5	138.5	308	60	28j6	8	4	7	60	39	42	45
112M	3.7	3.7	2.2		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
132S	5.5	5.5	3.7	3	265	230j6	300	4	20	14.5	273	455.5	375.5	212	171	315	80	38k6	10	5	8	80	53	64	58
	7.5	—	—		—	—	—	—	—	—	—	273	493.5	413.5	212	171	315	80	38k6	10	5	8	80	58	71
132M	—	7.5	5.5	4	265	230j6	300	4	20	14.5	273	493.5	413.5	212	171	315	80	38k6	10	5	8	80	—	71	70
	11	11	7.5		—	—	—	—	—	—	—	316	594	484	269	217	380	110	42k6	12	5	8	110	101	102
160M	15	15	11	4	300	250j6	350	5	20	18.5	316	614	504	269	217	380	110	42k6	12	5	8	110	113	119	114
160L	18.5	—	—		—	—	—	—	—	—	—	316	614	504	269	217	380	110	42k6	12	5	8	110	113	119
180M	22	18.5	15	5	350	300j6	395	5	20	18.5	364.5	667	557	288	236	394	110	48k6	14	5.5	9	110	190	200	190
	—	22	—		—	—	—	—	—	—	—	364.5	667	557	288	236	394	110	48k6	14	5.5	9	110	190	210
180L	30	30	18.5	5	350	300j6	395	5	20	18.5	364.5	740	630	325	250	394	110	55m6	16	6	10	110	210	240	210
	—	—	22		—	—	—	—	—	—	—	364.5	740	630	325	250	394	110	55m6	16	6	10	110	210	240
200LB	37	—	—	6	400	350j6	445	5	22	18.5	401.5	795	685	356	281	428	110	55m6	16	6	10	110	295	—	—
	45	—	—		—	—	—	—	—	—	—	401.5	795	685	356	281	428	110	55m6	16	6	10	110	320	—
200L	—	37	30	6	400	350j6	445	5	22	18.5	401.5	825	685	356	281	428	140	60m6	18	7	11	140	—	325	310
	—	45	37		—	—	—	—	—	—	—	401.5	825	685	356	281	428	140	60m6	18	7	11	140	—	330
225SB	55	—	—	6	500	450j6	545	5	22	18.5	456	816	706	381	306	486	110	55m6	16	6	10	110	375	—	—
225S	—	55	45		—	—	—	—	—	—	—	456	846	706	381	306	486	140	65m6	18	7	11	140	—	410

Note: Mounting dimensions are the conventional products and compatibility.

Note: Request a dimensional drawing to us for design use because the dimensions may be subject to change.

Outdoor types (IP55) / Flange mount

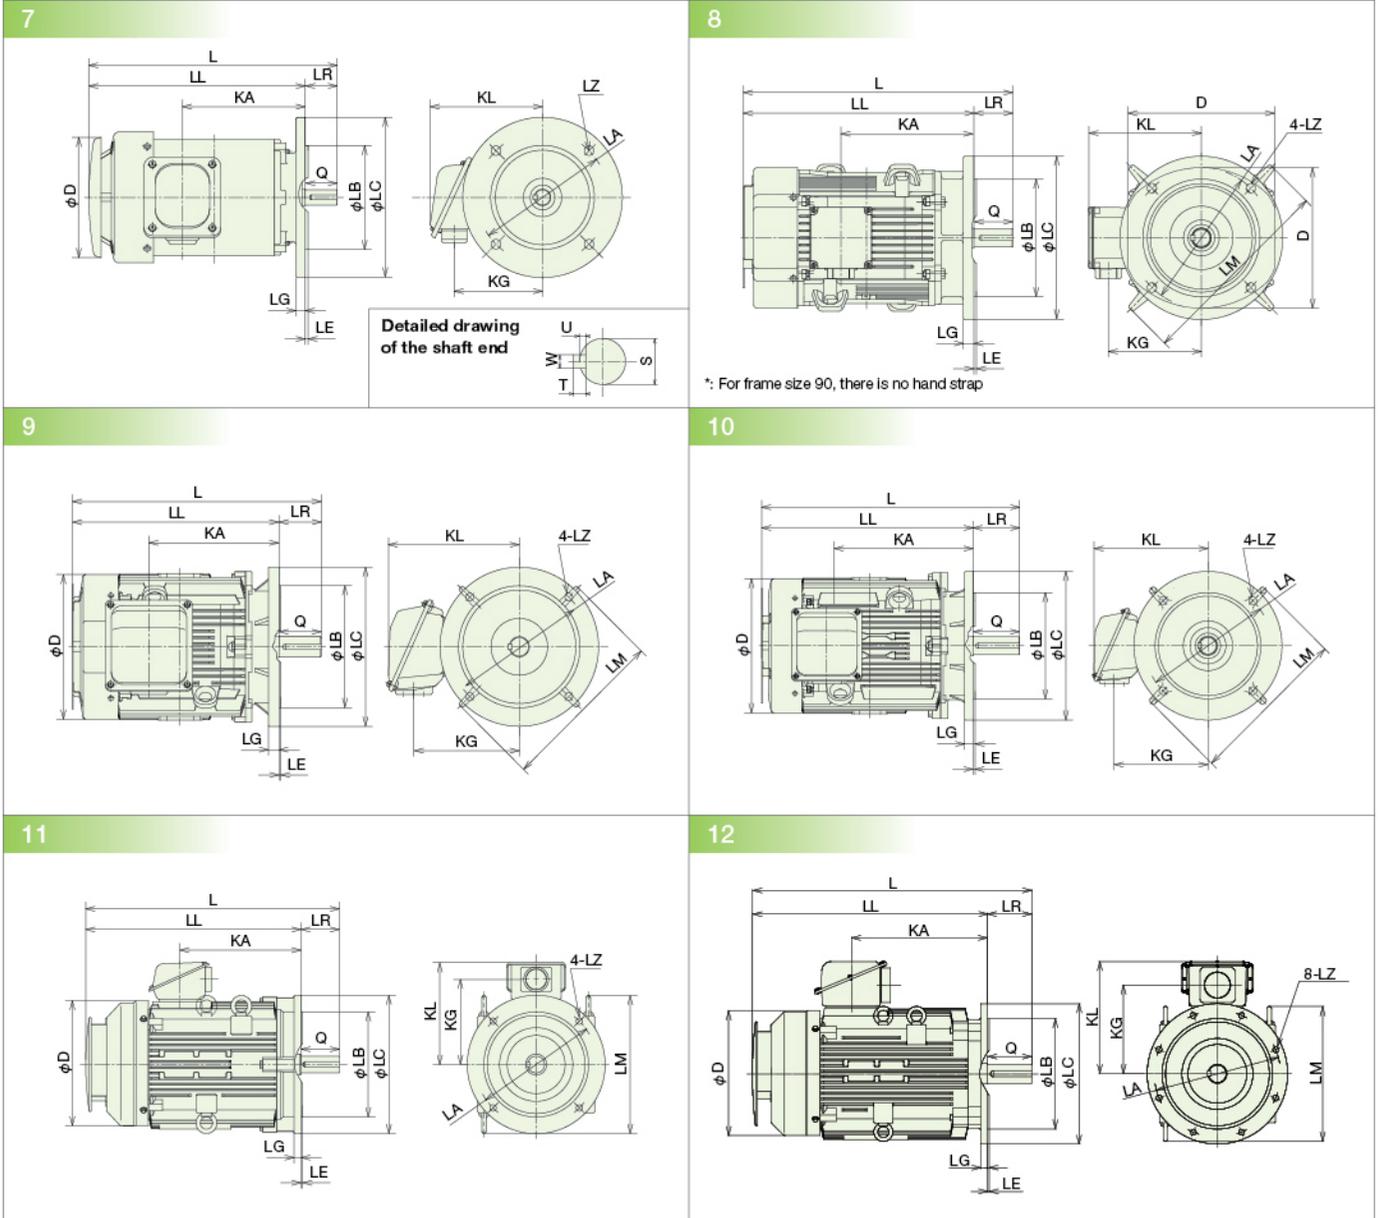

Frame size	Output (kW)			Fig. No.	Dimensions (mm)																	Approx. weight (kg)				
	2 Poles	4 Poles	6 Poles		LA	LB	LC	LE	LG	LZ	D	L	LL	KL	KA	KG	LM	LR	S	W	U	T	Q	2 Poles	4 Poles	6 Poles
80M	0.75	—	—	7	165	130j6	200	3.5	12	12	163	311	271	141	154	111	—	40	19j6	6	3.5	6	40	15.5	—	—
	—	0.75	—		—	—	—	—	—	—	—	—	323	283	166	—	—	—	—	—	—	—	—	—	—	—
90L	1.5	1.5	0.75	8	165	130j6	200	3.5	12	12	182/176	352	302	153	158.5	123	213	50	24j6	8	4	7	50	21	23	24.5
	2.2	—	—		215	180j6	250	4	16	14.5	198/195	392.5	332.5	160	185	130	270	60	28j6	8	4	7	60	—	34.5	37
100L	—	2.2	1.5	9	215	180j6	250	4	16	14.5	225/215	414.5	354.5	173	204	143	308	60	28j6	8	4	7	60	40	43	46
112M	3.7	3.7	2.2		215	180j6	250	4	16	14.5	225/215	414.5	354.5	173	204	143	308	60	28j6	8	4	7	60	40	43	46
132S	5.5	5.5	3.7	9	265	230j6	300	4	20	14.5	273	470.5	390.5	248	246	199.5	315	80	38k6	10	5	8	80	55	66	60
132M	7.5	7.5	5.5		265	230j6	300	4	20	14.5	273	508.5	428.5	248	284	199.5	315	80	38k6	10	5	8	80	—	73	72
160M	11	11	7.5	10	300	250j6	350	5	20	18.5	316	610	500	270	346	221.5	380	110	42k6	12	5	8	110	104	105	97
160L	15	—	—		300	250j6	350	5	20	18.5	316	630	520	270	366	221.5	380	110	42k6	12	5	8	110	116	122	117
180M	18.5	15	11	11	350	300j6	395	5	20	18.5	364.5	717	607	292	347	243	394	110	48k6	14	5.5	9	110	195	205	195
180L	22	18.5	15		350	300j6	395	5	20	18.5	364.5	790	680	325	412	250	394	110	55m6	16	6	10	110	215	245	215
200LB	37	—	—	12	400	350j6	445	5	22	18.5	401.5	855	745	356	431	281	428	110	55m6	16	6	10	110	300	—	—
200L	45	37	30		400	350j6	445	5	22	18.5	401.5	885	745	356	431	281	428	140	60m6	18	7	11	140	—	330	315
225SB	—	45	37	12	500	450j6	545	5	22	18.5	456	886	776	381	439	306	486	110	55m6	16	6	10	110	380	—	—
225S	55	—	—		500	450j6	545	5	22	18.5	456	916	776	381	439	306	486	140	65m6	18	7	11	140	—	415	425

Note : Mounting dimensions are the conventional products and compatibility.

Note : Request a dimensional drawing to us for design use because the dimensions may be subject to change.


Terminal box dimensions

Indoor types terminal box (IP44)

<p>1</p>	<p>2</p>																																																	
<p>3</p>	<p>4</p>																																																	
<p>5</p>	<p>6</p>																																																	
<p>7</p>	<p>8</p>																																																	
<p>9</p>	<p>Indoor types terminal box specifications</p> <table border="1"> <thead> <tr> <th rowspan="2">Frame size</th> <th rowspan="2">Fig.No.</th> <th colspan="3">Terminal box dimensions</th> </tr> <tr> <th>A (mm)</th> <th>B (mm)</th> <th>C (mm)</th> </tr> </thead> <tbody> <tr> <td>71, 80</td> <td>1</td> <td>78</td> <td>45</td> <td>38</td> </tr> <tr> <td>90L, 100L, 112M</td> <td>2</td> <td>88</td> <td>53</td> <td>50</td> </tr> <tr> <td rowspan="2">132S, 132M</td> <td>3 (3.7kW6Poles)</td> <td rowspan="2">127</td> <td rowspan="2">70</td> <td rowspan="2">80</td> </tr> <tr> <td>4 (5.5kW, 7.5kW)</td> </tr> <tr> <td>160M, 160L</td> <td>5</td> <td>164</td> <td>105</td> <td>80</td> </tr> <tr> <td>180M</td> <td>6</td> <td>164</td> <td>105</td> <td>80</td> </tr> <tr> <td>180L</td> <td>7</td> <td>227</td> <td>140</td> <td>80</td> </tr> <tr> <td>200LB, 200L, 225SB, 225S</td> <td>8</td> <td>227</td> <td>140</td> <td>130</td> </tr> <tr> <td>250SB~</td> <td>9</td> <td>301.4</td> <td>232</td> <td>130</td> </tr> </tbody> </table>	Frame size	Fig.No.	Terminal box dimensions			A (mm)	B (mm)	C (mm)	71, 80	1	78	45	38	90L, 100L, 112M	2	88	53	50	132S, 132M	3 (3.7kW6Poles)	127	70	80	4 (5.5kW, 7.5kW)	160M, 160L	5	164	105	80	180M	6	164	105	80	180L	7	227	140	80	200LB, 200L, 225SB, 225S	8	227	140	130	250SB~	9	301.4	232	130
Frame size	Fig.No.			Terminal box dimensions																																														
		A (mm)	B (mm)	C (mm)																																														
71, 80	1	78	45	38																																														
90L, 100L, 112M	2	88	53	50																																														
132S, 132M	3 (3.7kW6Poles)	127	70	80																																														
	4 (5.5kW, 7.5kW)																																																	
160M, 160L	5	164	105	80																																														
180M	6	164	105	80																																														
180L	7	227	140	80																																														
200LB, 200L, 225SB, 225S	8	227	140	130																																														
250SB~	9	301.4	232	130																																														

Note : Knock diameter (KD) - See page 13

Outdoor types terminal box (IP55)

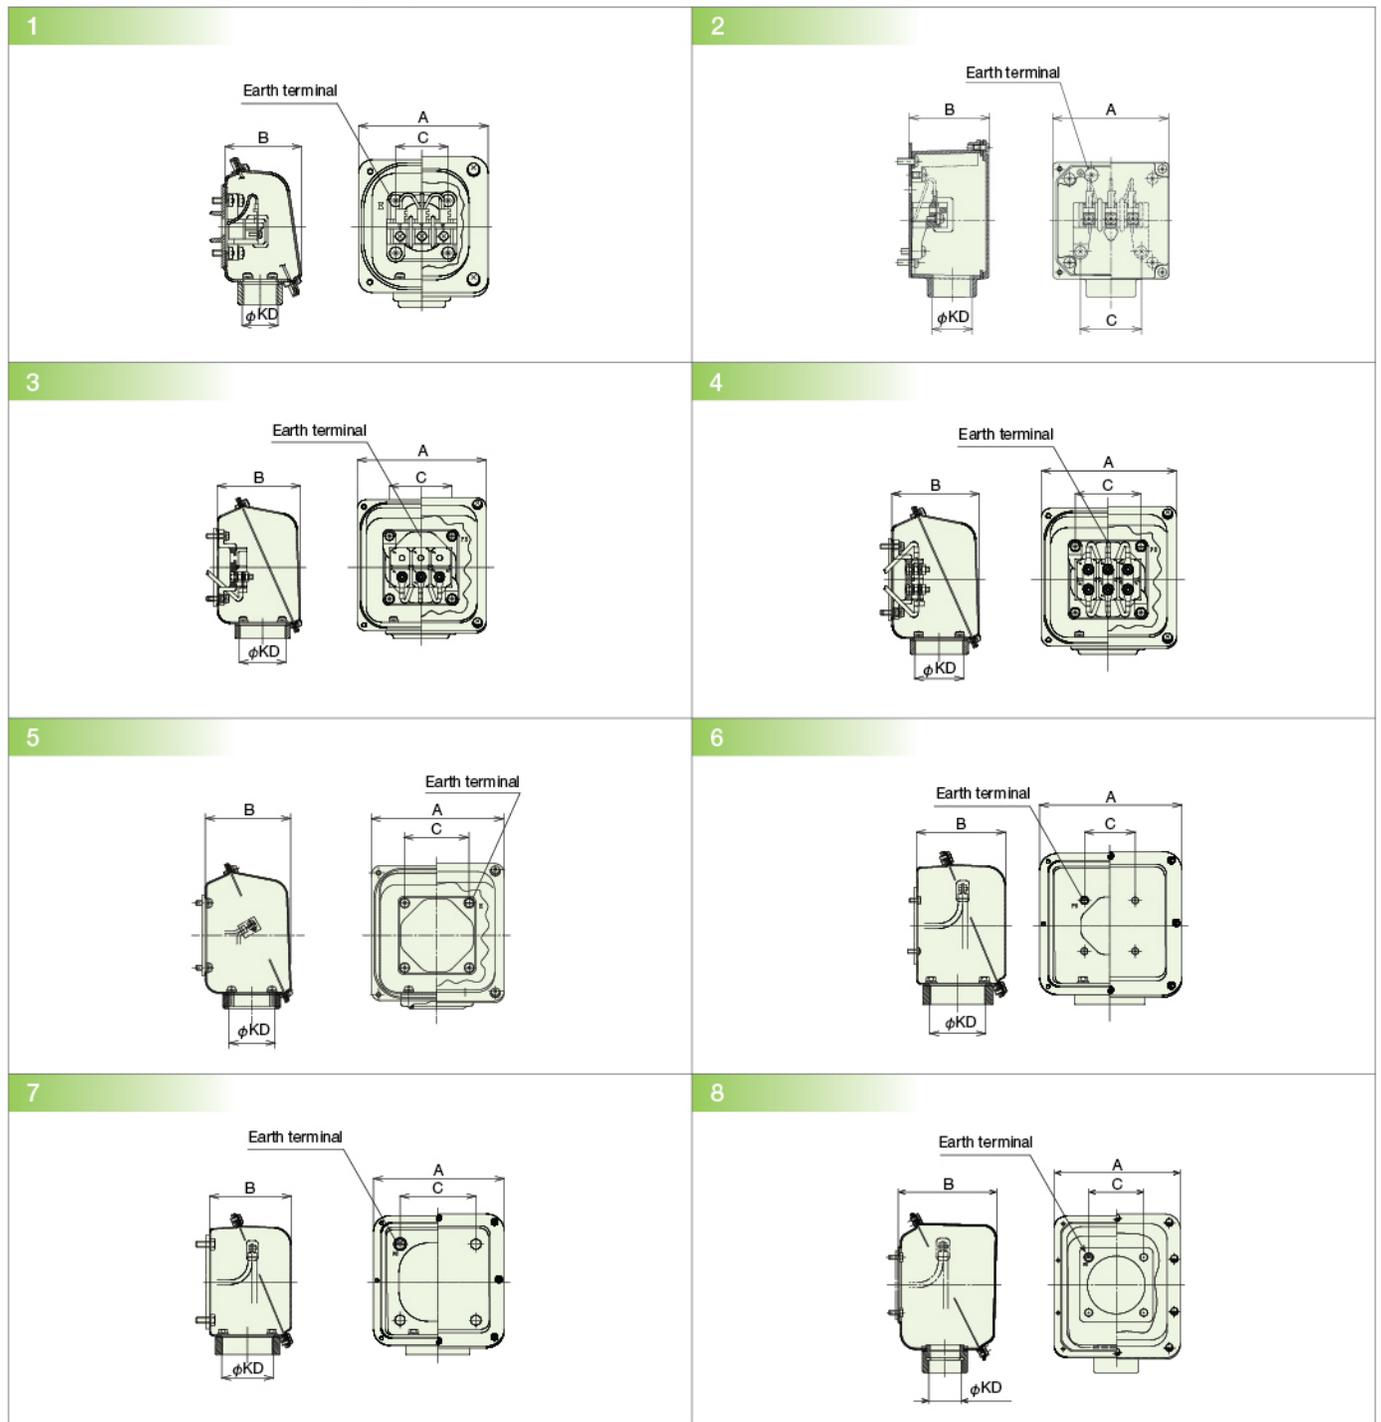

Note : Knock diameter (KD) - See page 13

Indoor types terminal box specifications

Frame size	Fig.No.	Terminal box dimensions		
		A (mm)	B (mm)	C (mm)
80	1	96	56	38
90L, 100L, 112M	2	95	63	50
132S, 132M	3 (3.7kW6Poles)	167	105.5	80
160M, 160L				
180M	5	167	106.5	80
180L	6	227	140	80
200LB, 200L, 225SB, 225S	7	227	140	130
250SB-	8	301.4	232	130

Terminal box dimensions

Knock diameter (KD) dimensions of the terminal box

Output (kW)	KD (mm)					
	Indoor types (IP44)			Outdoor types (IP55)		
	2 Poles	4 Poles	6 Poles	2 Poles	4 Poles	6 Poles
0.75	22	22	28	PF3/4	PF3/4	PF3/4
1.5	28	28	28	PF3/4	PF3/4	PF1
2.2	28	28	28	PF1	PF1	PF1
3.7	28	28	36	PF1	PF1	PF1-1/4
5.5	36	36	36	PF1-1/4	PF1-1/4	PF1-1/4
7.5	36	36	52	PF1-1/4	PF1-1/4	PF1-1/2
11	52	52	52	PF1-1/2	PF1-1/2	PF1-1/2
15	52	52	52	PF1-1/2	PF1-1/2	PF1-1/2
18.5	65	65	65	PF2	PF2	PF2
22	65	65	65	PF2	PF2	PF2
30	78	78	78	PF2	PF2	PF2
37	78	78	78	PF2-1/2	PF2-1/2	PF2-1/2
45	78	78	78	PF2-1/2	PF2-1/2	PF2-1/2
55	92	92	92	PF3	PF3	PF3
75	78	78	78	PF2-1/2	PF2-1/2	PF2-1/2
90	78	78	78	PF2-1/2	PF2-1/2	PF2-1/2
110	92	92	92	PF3	PF3	PF3
132	92	92	92	PF3	PF3	PF3

Motor wiring connection

Voltage	Number of lead wires	Starting method	Connection method							
Single voltage	3	Direct on line								
		Direct on line Y-Δ start	<table border="1"> <thead> <tr> <th>CONNECTION</th> <th>Y-Δ START</th> <th>CHANGE OVER OF STARTER TERMINAL</th> </tr> </thead> <tbody> <tr> <td>DIRECT ON LINE</td> <td>STARTER V2 W2 U2</td> <td>Y START Δ RAN</td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>	CONNECTION	Y-Δ START	CHANGE OVER OF STARTER TERMINAL	DIRECT ON LINE	STARTER V2 W2 U2	Y START Δ RAN	
CONNECTION	Y-Δ START	CHANGE OVER OF STARTER TERMINAL								
DIRECT ON LINE	STARTER V2 W2 U2	Y START Δ RAN								
Double voltage (ex. 220/380V)	6	Direct on line	<p>High voltage (Y) Low voltage (Δ)</p>							

Voltage	Number of lead wires	Starting method	Connection method																				
Double voltage (ex. 200/400V 220/440V)	9	Direct on line	<p>400V class (Y) 200V class (2Y)</p>																				
			<p>400V class (Δ) 200V class (2Δ)</p>																				
Double voltage (ex. 200/400V 220/440V)	12	Direct on line Y-Δ start	<table border="1"> <thead> <tr> <th colspan="2">CONNECTION</th> <th colspan="2">Y START</th> </tr> </thead> <tbody> <tr> <td colspan="2">DIRECT ON LINE</td> <td colspan="2">CONNECTIONS BETWEEN MOTOR AND STARTER</td> </tr> <tr> <td>400V CLASS</td> <td>200V CLASS</td> <td>400V CLASS</td> <td>200V CLASS</td> </tr> <tr> <td> </td> <td> </td> <td>STARTER V2 W2 U2</td> <td>STARTER V2 W2 U2</td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table> <p>INNER CONNECTIONS</p>	CONNECTION		Y START		DIRECT ON LINE		CONNECTIONS BETWEEN MOTOR AND STARTER		400V CLASS	200V CLASS	400V CLASS	200V CLASS			STARTER V2 W2 U2	STARTER V2 W2 U2				
CONNECTION		Y START																					
DIRECT ON LINE		CONNECTIONS BETWEEN MOTOR AND STARTER																					
400V CLASS	200V CLASS	400V CLASS	200V CLASS																				
		STARTER V2 W2 U2	STARTER V2 W2 U2																				

*1: Please remove connection plates at starting method of Y-Δ

Other Line-up

Premium High-Efficiency Motors

Equivalent to IE3 class



High-Efficiency Motors

Equivalent to IE2 class



Brake Motors

On Brake & Off Brake model
Brake model : HBA, FA, NA
Output : 0.2 ~ 30kW (in case 4 pole)



Gear Motors

GH-series (For General load)
Output : 0.4 ~ 7.5kW 1/5 ~ 1/45



High-Pressure Blowers

Vortex Blower
E-series (Large air flow type)
G-series (High-pressure type)
DN-series (General type)



Water Pumps

JD Type : Circulation Pumps
JL Type : In-line Pumps
Output : 0.25kW ~ 11kW



Technical Managements

Special Instruction

[Inspect the machine before use]

Please inspect the following area before turning on the switch ;

- Inspect if the following area are in ground wiring and insulation wiring,
- Inspect preventive apparatus and control circuit if they are working properly.
- Is the value of insulation resistance less than 1MΩ or not.
- Inspect if machine installation (direct belt) is correctly done.

[Precaution during use]

- Should be careful in loading capacity and frequency in turning on the machine. Machine should not be on for a long period of time.
- If the motor rotates in a wrong direction, in case of three-phase motor, swap the two wires. In case of single-phase motor, re-wiring following the connection circuit.
- Voltage Amp should be within a correct limitation.
 - Is voltage amp correct as indicated in the instruction manual ?
 - Is there any balance in voltage amp for three-phase line ?
 - Is the electrical distributed power higher than the indicated limitation? It should be adjusted to an appropriate loading capacity.
 - Inspect to make sure there is no vibration sound and abnormal heating.

Outdoor Installation

- Use a motor that has a totally enclosed with cooling fan and can be placed outside a building. The motor can be installed outside because it can prevent any water droplets in between core structures. The terminal box should have water protection and seal that can prevent water coming into lead wire connection. Insulated wires can tolerate humidity and seal that can prevent water seeping into lead wire connection.
- You can connect wires in steel tubed connection on the side (For wire connection of motor outside the building, you should follow the instructional pictures in preventing rain from iron pipe seeping into the terminal box).
- General type of totally enclosed motor with cooling fan is IP44 class. If installing in high dust area, you can use IP54 class. In case having water injection into a machine, you can use IP55 class.

Maintenance


[Daily basis]

- Surrounding environment :
Inspect the temperature around the entire machine, humidity, dust, gas and ventilation system.
- Working essentials :
Inspect the electric distribution (loading capacity), frequency and voltage amp.
- Loading condition and machine connection :
Inspect the tension of connecting belt.
- Condition around machine connection area :
Vibration and sound for making sure if it's working properly.

[Periodic basis]

- Should be inspected
Bearings, insulating stator (no less than 1MΩ, looseness of any bolt and nut, colors, etc. Including inspection of motor condition if it's working correctly at least once a year.

Installation Example

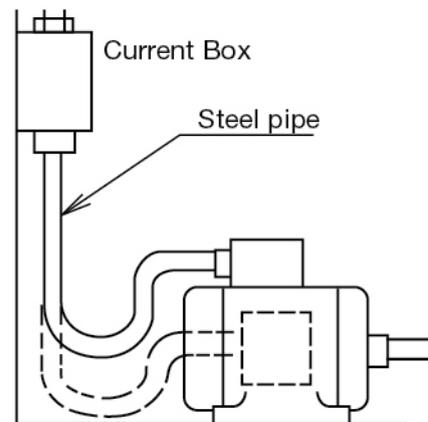

Hitachi Asia, Ltd.

Hitachi Industrial Technology (Thailand), Ltd.