

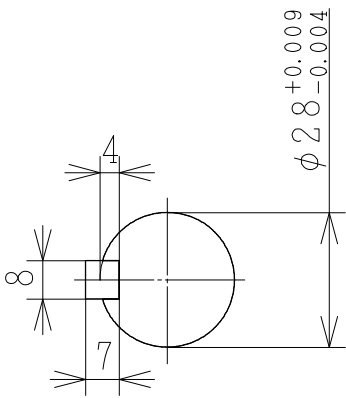
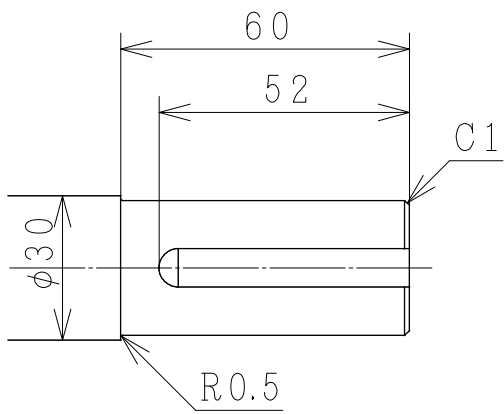
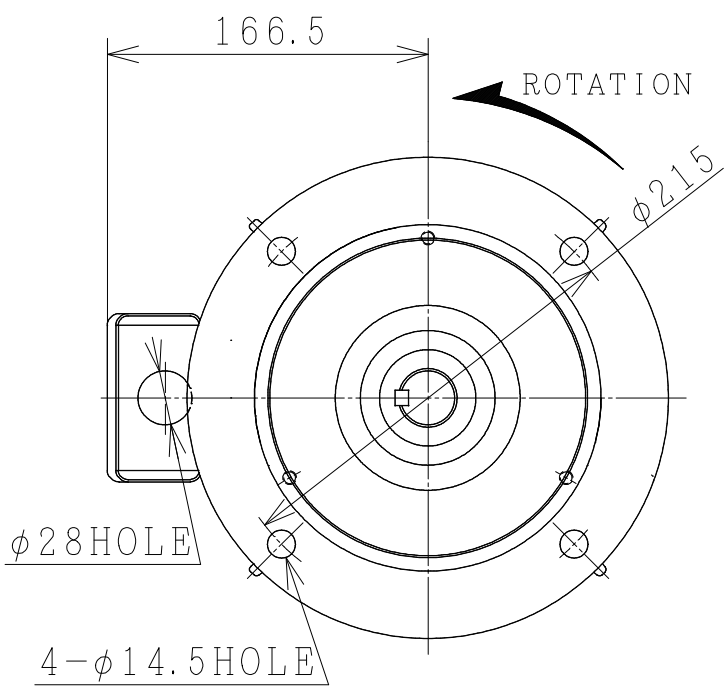


THREE-PHASE INDUCTION MOTOR

OUTPUT	TYPE	FORM	RATING	VOLTAGE (V)	FREQ. (Hz)	SYNC. SPEED (min ⁻¹)	POLES	INS. CLASS	MASS (kg)
5HP	VTFO	K	S1	220/380V	50	3000	2	B	33
5HP	VTFO	K	S1	220/380V	50	1500	4	B	35
3HP	VTFO	K	S1	220/380V	50	1000	6	B	32

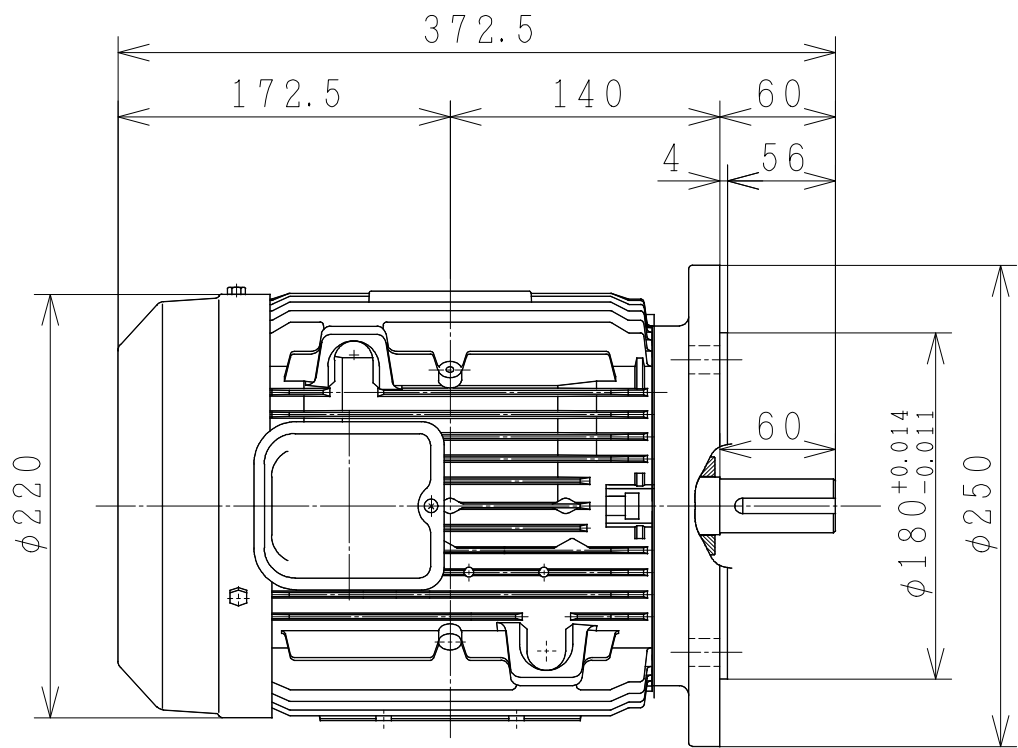

PROTECTION: IP44



CUSTOMER				QTY.	ORDER NO.		WORK NO.	REV.
DWN	C. ANAN	06-Jun-2013	DIMENSIONS	HITACHI Hitachi Industrial Technology (Thailand),Ltd.		4HTD02643		SH.
CHKD	W. THAWAT	S						
APPD	T. SHIMOZONO							
FRAME SIZE				FF215-112M				