


THREE-PHASE INDUCTION MOTOR

OUTPUT	TYPE	FORM	RATING	VOLTAGE (V)	FREQ. (Hz)	SYNC. SPEED (min ⁻¹)	POLES	INS. CLASS	MASS (kg)
1/7HP	TO	K	S1	220/380	50	1500	4	F	5.5
1/4HP	TO	K	S1	220/380	50	1500	4	F	5.5

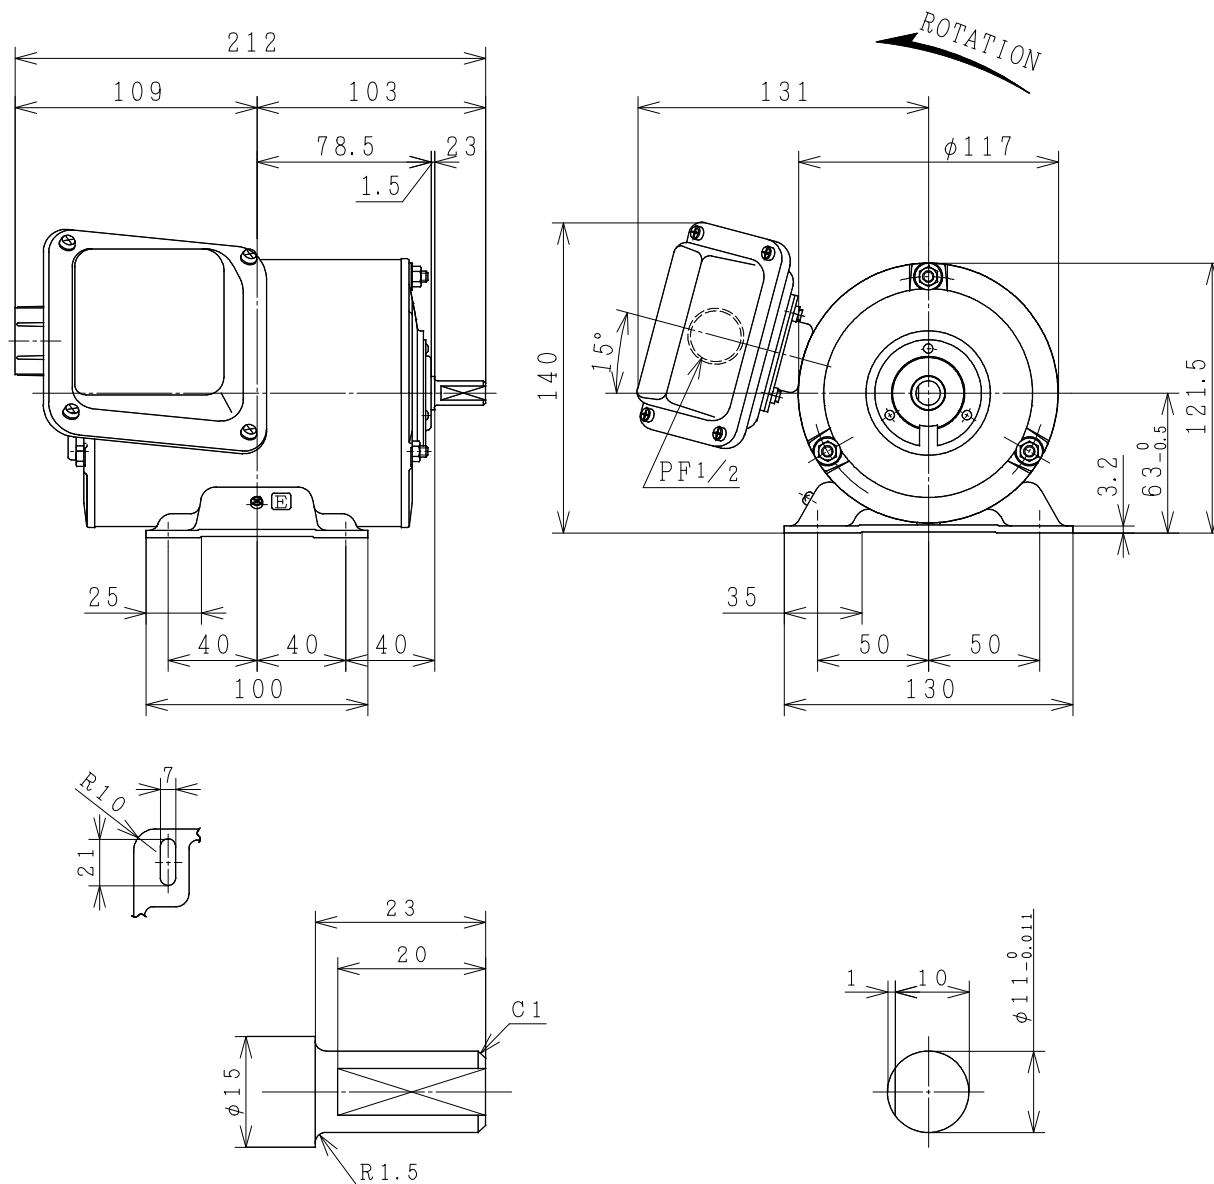

PROTECTION : IP55

PROJECTION

CUSTOMER				QTY.	ORDER No.	WORK No.	REV.
DWN.	N. WICHARN	24-JUNE-2015	DIMENSIONS	HITACHI Hitachi Industrial Technology (Thailand), Ltd.		HITT WORKS DWG. No.	SH.
CHKD.	W. THAWAT	S				4HTD03121	
APPD.	T. SHIMOZONO						
FRAME SIZE TOB-63M (TMLR)							