



THREE-PHASE INDUCTION MOTOR

OUTPUT	TYPE	FORM	RATING	VOLTAGE (V)	FREQ. (Hz)	SYNC. SPEED (min ⁻¹)	POLES	INS. CLASS	MASS (kg)
40 HP	VTFO	KK	S1	380/415	50	3000	2	F	140
40 HP	VTFO	KK	S1	380/415	50	1500	4	F	165
25 HP	VTFO	KK	S1	380/415	50	1000	6	F	160
30 HP	VTFO	KK	S1	380/415	50	1000	6	F	170

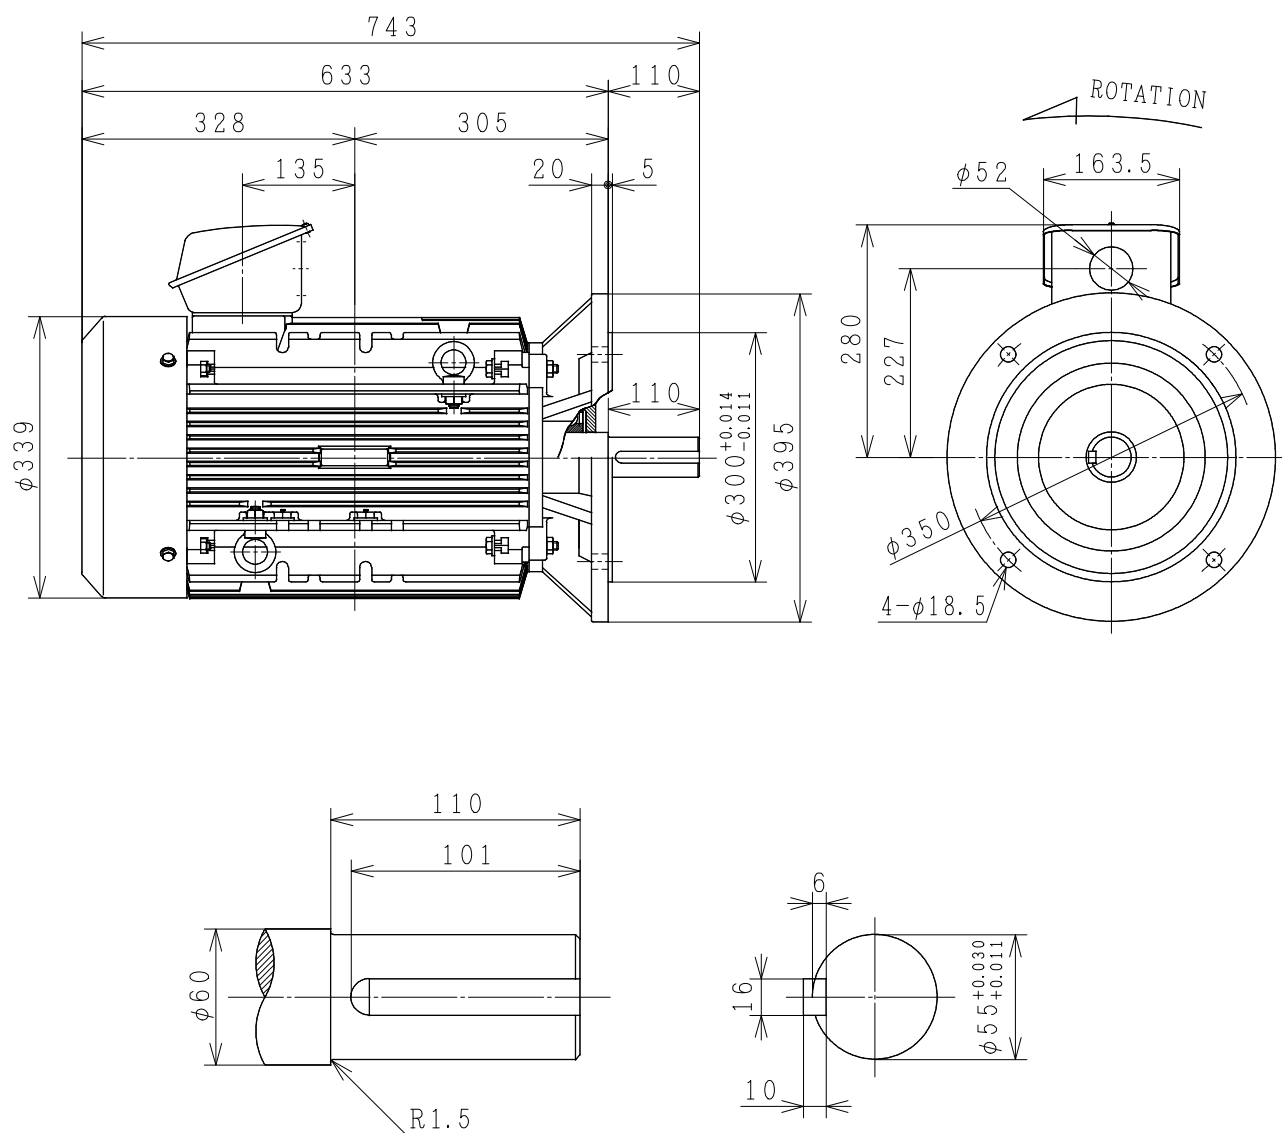

PROTECTION: IP44

PROJECTION



CUSTOMER			QTY.	ORDER No.	WORK No.	REV.
DWN.	D. Theeranan	23-Jun-2015	 Hitachi Industrial Technology (Thailand), Ltd. HITT WORKS DWG. No. 4HTD03122			SH.
CHKD.	T. Shimozone	Σ				
APPD.	T. Shimozone	Σ				
FRAME SIZE VTFOD-FF350 (180L)			DIMENSIONS			