
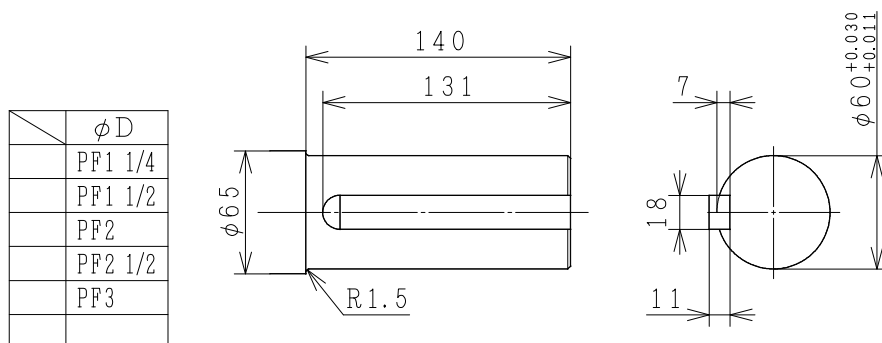


三相誘導電動機 THREE-PHASE INDUCTION MOTOR

出力 OUTPUT	形 TYPE	式 FORM	定 格 RATING	電 圧 VOLTAGE [V]	周 波 数 FREQ. [Hz]	同期回転速度 SYNC. SPEED (min ⁻¹)	極 数 POLES	耐熱クラス TH. CLASS	質 量 MASS [kg]
50HP	VTFOA	LKK	S1	380/415	50	1500	4	F	330
60HP	VTFOA	LKK	S1	380/415	50	1500	4	F	335
40HP	VTFOA	LKK	S1	380/415	50	1000	6	F	330
50HP	VTFOA	LKK	S1	380/415	50	1000	6	F	345

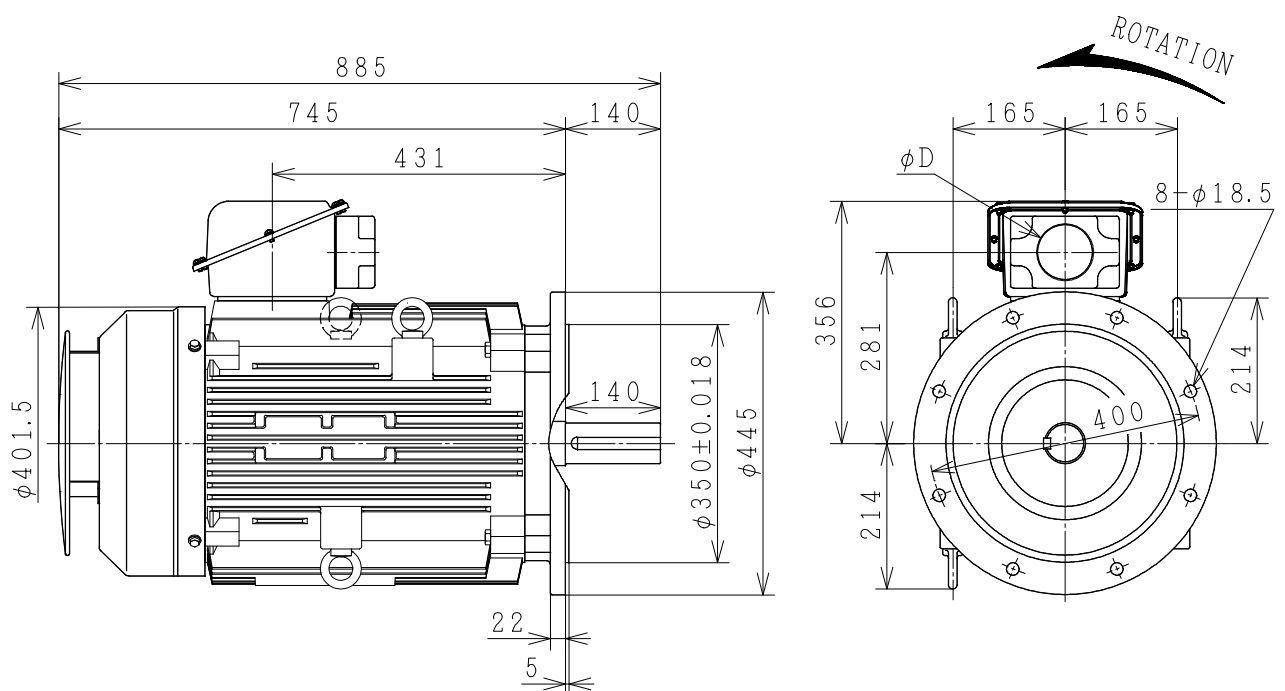

φD
PF1 1/4
PF1 1/2
PF2
PF2 1/2
PF3

PROTECTION : IP55

保護方式 (PROTECTION)	塗装色 (COLOR)	
軸受 (BRG.)	反負荷側 (O. S.)	負荷側 (D. S.)
用 途 USE	付属品 ACCESSORY	
備 考 NOTICE		
御注文主 CUSTOMER	数量 QTY.	受注番号 ORDER NO.
		作業番号 WORK NO.
		REV.

DWN. C. Saknarin	05-Oct-2015	寸 法 図	HITACHI	NARASHINO DWG. NO.	SH.
CHKD. P. Damrongsak				3244HTD03276	
APPD. T. Shimozone		DIMENSIONS	Hitachi Industrial Technology (Thailand) Ltd.		

枠 番 FRAME SIZE VTFOAL-FF400 (200L)