THREE-PHASE INDUCTION MOTOR

OUTPUT	TYPE	FORM	RATING	VOLTAGE (V)	FREQ. (Hz)	SYNC. SPEED (min^{-1})	POLES	TH. CLASS	MASS (kg)
1HP	TFO	K	S1	220/380	50	3000	2	F	10
1HP	TFO	K	S1	220/380	50	1500	4	F	12
1/2HP	TFO	K	S1	220/380	50	1000	6	F	12

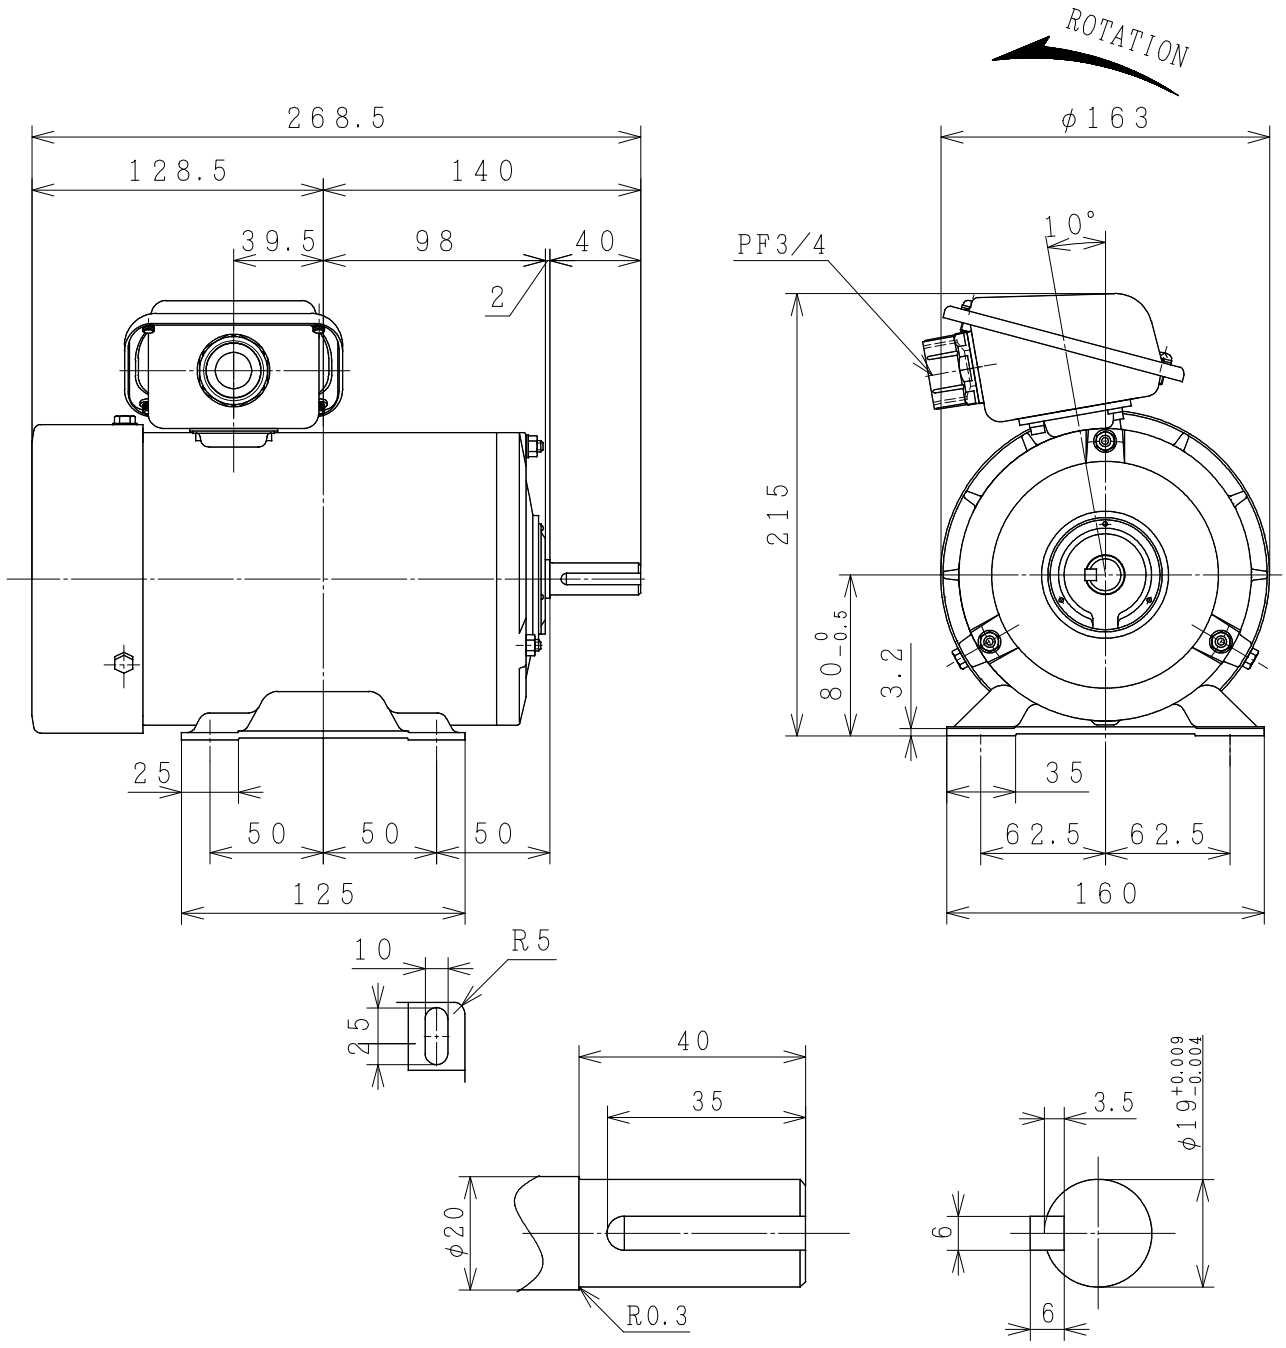

PROTECTION : IP55

PROJECTION

CUSTOMER	QTY.	ORDER No.	WORK No.	REV.

DIMENSIONS

HITACHI
Hitachi Industrial Technology (Thailand),Ltd.

HITT WORKS DWG. No. 4HTD03358

SH.

FRAME SIZE TFOB-80M (TMHD)