
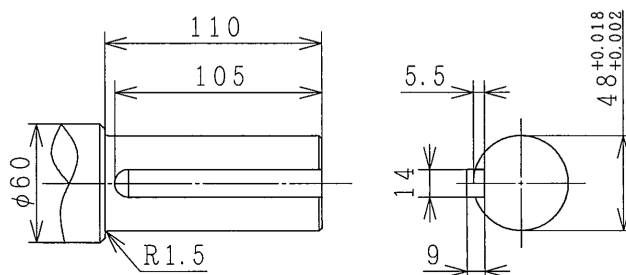


三相誘導電動機 THREE-PHASE INDUCTION MOTOR

出力 OUTPUT	形 TYPE	式 FORM	定格 RATING	電圧 VOLTAGE (V)	周波数 FREQ. (Hz)	同期回転速度 SYNC. SPEED (min ⁻¹)	極数 POLES	耐熱クラス TH. CLASS	質量 MASS (kg)
30HP	VTFOA	LKK	S1	380/415	50	3000	2	F	
25HP	VTFOA	LKK	S1	380/415	50	1500	4	F	
30HP	VTFOA	LKK	S1	380/415	50	1500	4	F	
20HP	VTFOA	LKK	S1	380/415	50	1000	6	F	

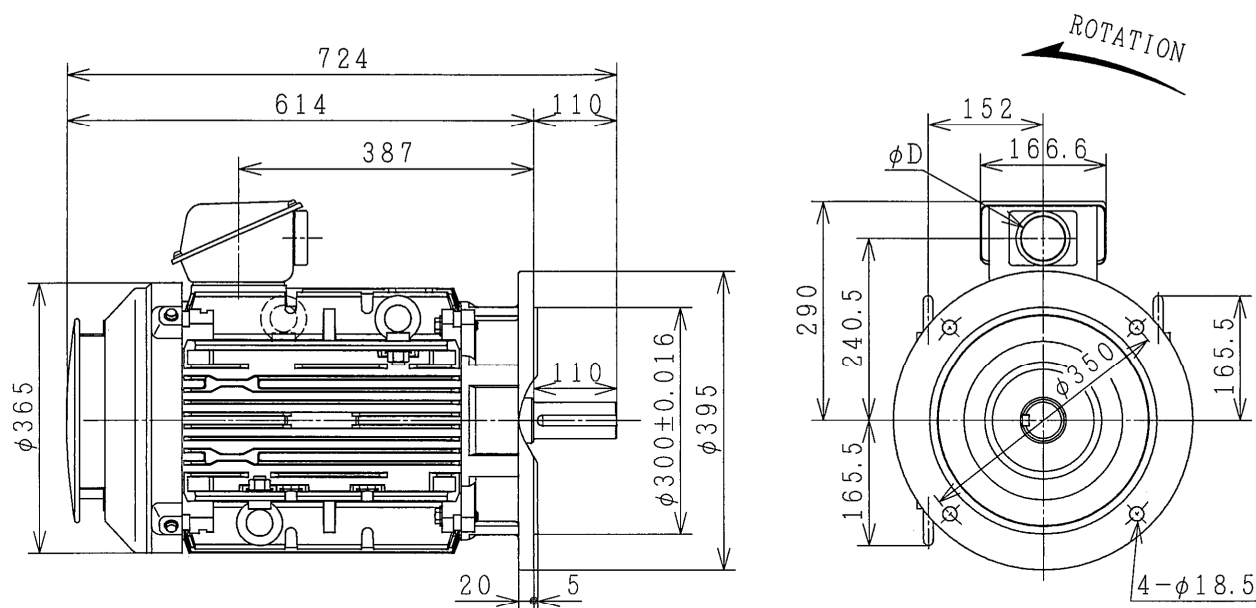

ϕD
PF1 1/4
PF1 1/2
PF2
PF2 1/2
PF3

PROTECTION: IP55



CUSTOMER				QTY.	ORDER No.	WORK No.	REV.
DWN.	H. Pipatpong	10-Sep-2024	DIMENSIONS	HITACHI Hitachi Industrial Technology (Thailand), Ltd.	HITT WORKS DWG. No.	4HTD05804	SH.
CHKD.	S. Pichai						
APPD.	D. Thidech						
FRAME SIZE							VTFOAL-180M (TMVP)