
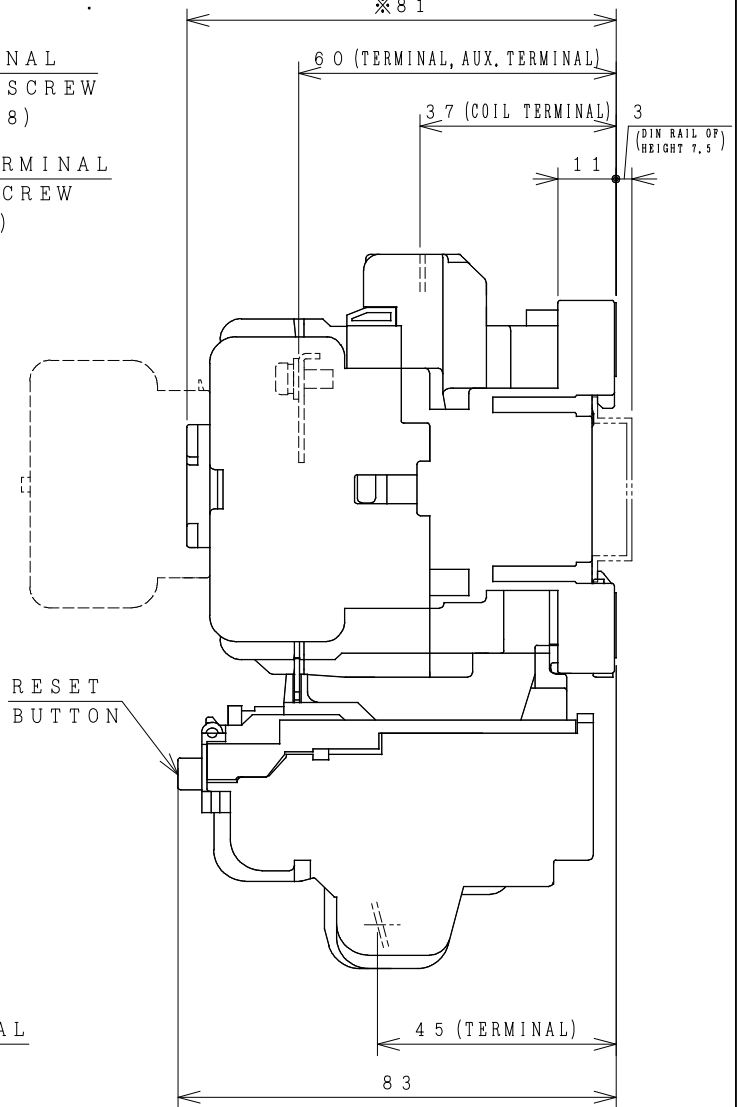


# HITACHI ELECTROMAGNETIC SWITCH



Type	Rated insulation voltage (Ui)	Max. rated capacity of motor			Rated thermal current (AC1 = 1th)	Applicable standard	Aux. Contact	Weight
		240V	3.5kW	13A				
HS10-T	AC 690 V	240V	3.5kW	13A	20A A	IEC 60947-4-1	1a or 1b	0.45 kg
HS10-TK		440V	5.5kW	12A				

※WITH AUX. CONTACT SIDE ON UNIT = 68mm.

※WITH AUX. CONTACT HEAD ON UNIT = 112mm.

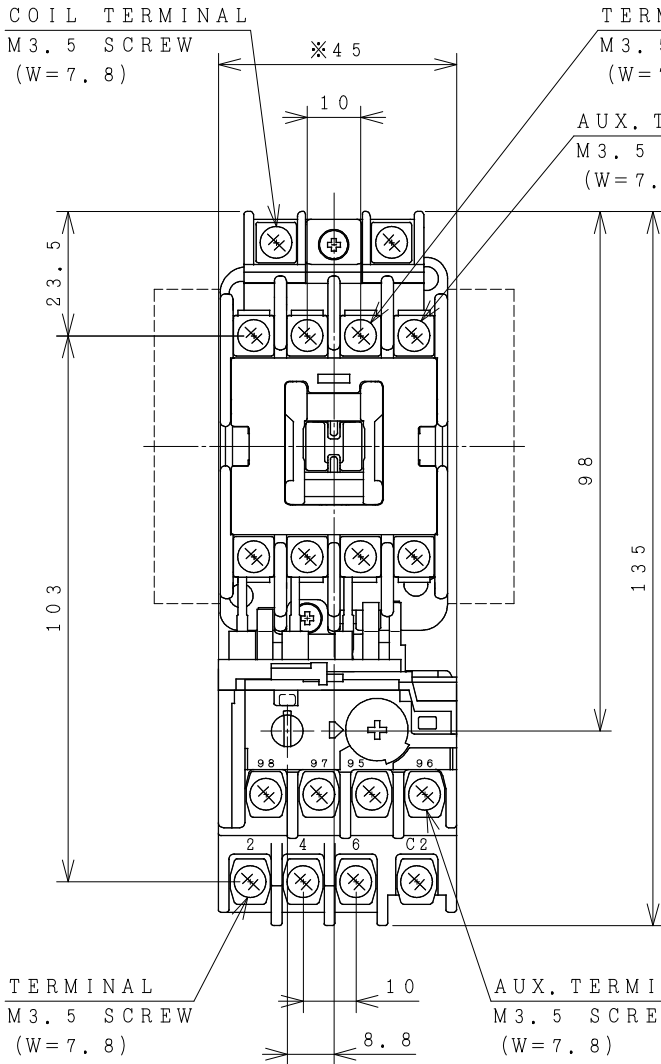

OUTLINE DIMENSIONS.

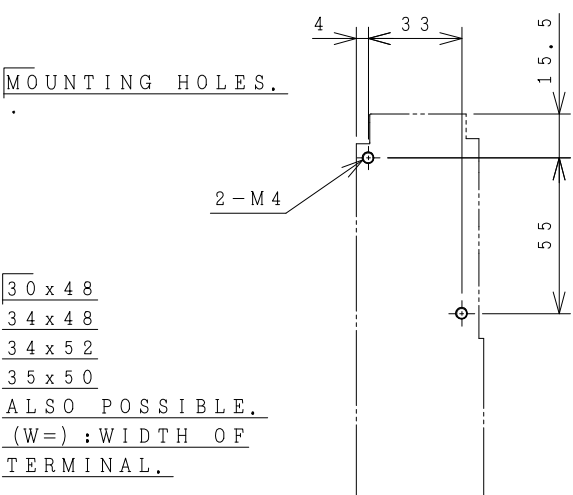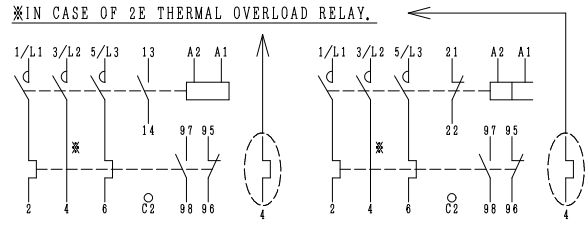

AUX. CONTACTS : 1 a  
CONTACTS ARRANGEMENT.  
(Reference 43067246R04).

DWN. O. SITTICHAJ 23/06/16	PROJECTION	TITLE
CHKD. <i>C. Kiatissak</i>	SCALE	DIMENSION OF HS10-T, TK
APPD. <i>T. Kiatissak</i>	NTS.	
HITACHI Hitachi Industrial Technology (Thailand), Ltd.		HITT WORKS DWG. No.
		4HTN000785
		REV.
		00
		SH.
		01
		01

※REMARK  
- DIMENSION UNIT = Millimeter (mm).  
- (a) = AUX. CONTACT NORMALLY OPENED.  
- (b) = AUX. CONTACT NORMALLY CLOSED.

- 30 x 48
- 34 x 48
- 34 x 52
- 35 x 50

ALSO POSSIBLE.  
(W) : WIDTH OF  
TERMINAL.