
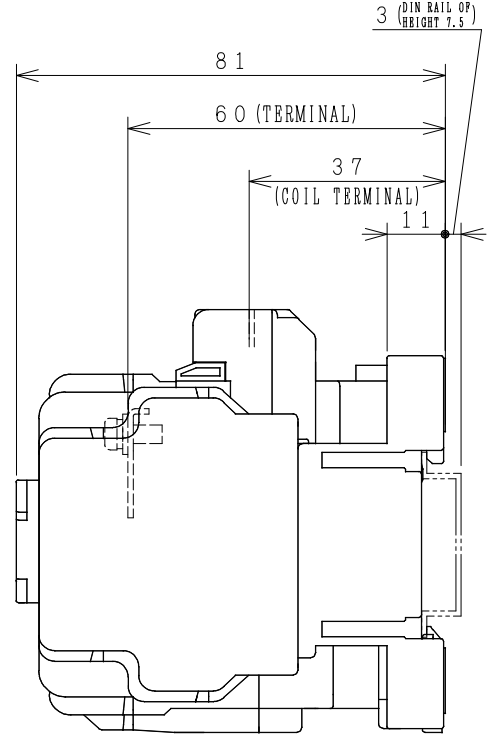



# HITACHI ELECTROMAGNETIC CONTACTOR

Type	Rated insulation voltage (Ui)	Max. rated capacity of motor			Rated thermal current (AC1 = Ith)	Applicable standard	Aux. Contact	Weight
		240V	3.5kW	13A				
HS10-R	AC 690 V	240V	3.5kW	13A	20 A	IEC 60947-4-1	1a2b x2	0.75 kg
		440V	5.5kW	12A				

△ ~~WITH AUX. CONTACT SIDE ON UNIT~~ 121mm.

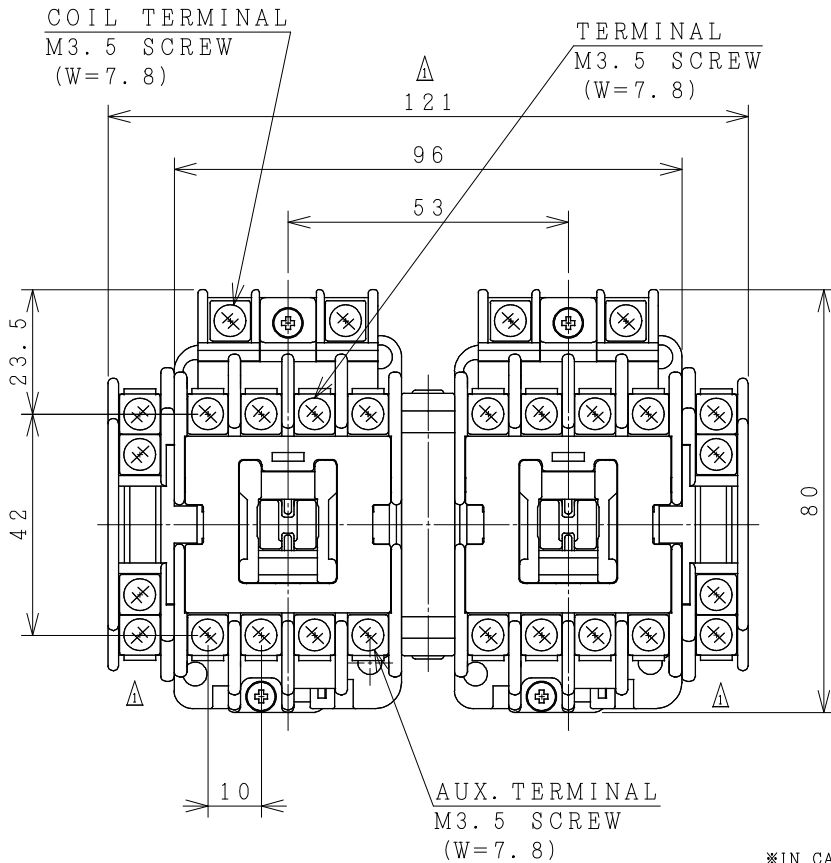


OUTLINE DIMENSIONS.

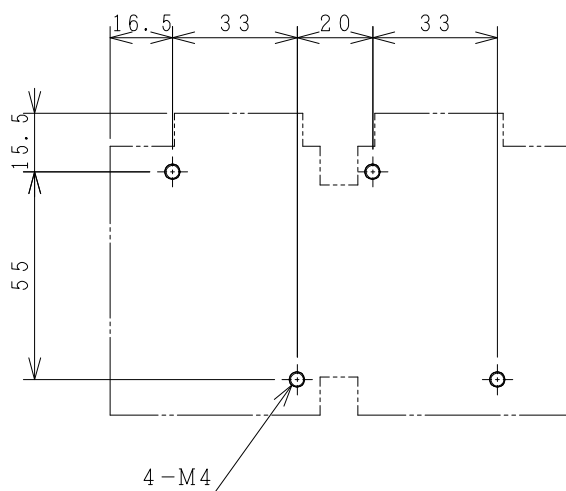


MOUNTING HOLES.

\*IN CASE OF ADD AUX. CONTACT SIDE ON UNIT.

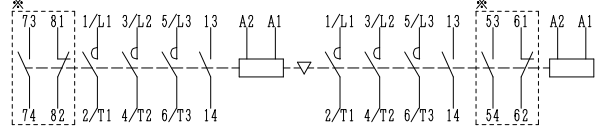

AUX. CONTACTS : 1 a

\*IN CASE OF ADD AUX. CONTACT SIDE ON UNIT.

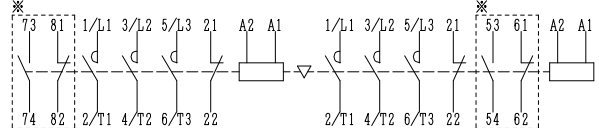

AUX. CONTACTS : 1 b  
CONTACTS ARRANGEMENT.

(Reference 43067251R04).

\*REMARK

- DIMENSION UNIT = Millimeter (mm).

- (a) = AUX. CONTACT NORMALLY OPENED.

- (b) = AUX. CONTACT NORMALLY CLOSED.

DWN.	O. SITTICHAJ	07/06/16	PROJECTION	TITLE
CHKD.	J. JANDER		SCALE	DIMENSION OF HS10-R
	C. KIATTISAK		NTS.	
APPD.	T. SEKIGUCHI			
HITT WORKS DWG. No.				REV.
 <b>HITACHI</b> Hitachi Industrial Technology (Thailand), Ltd.				01
				SH.
				01
				01

(W=) : WIDTH OF TERMINAL.