
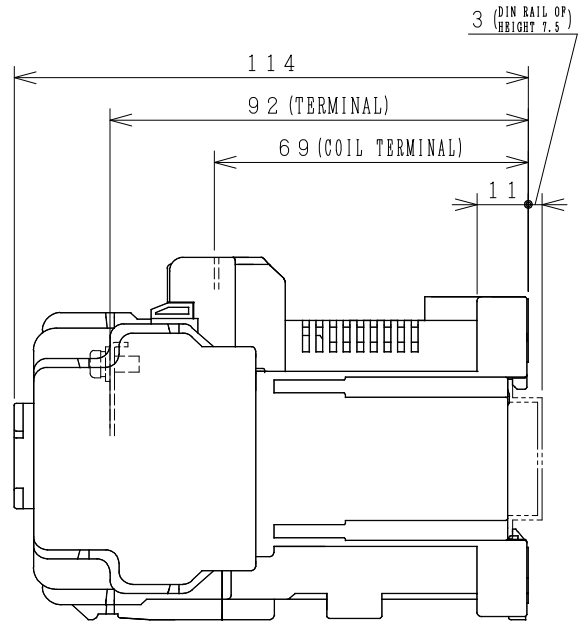



HITACHI ELECTROMAGNETIC CONTACTOR

Type	Rated insulation voltage (Ui)	Max. rated capacity of motor			Rated thermal current (AC1 = Ith)	Applicable standard	Aux. Contact	Weight
		240V	3.5kW	13A				
HS10-RG	AC 690 V	440V	5.5kW	12A	20 A	IEC 60947-4-1	1a2b x2	1.30 kg

△ ~~WITH AUX. CONTACT SIDE ON UNIT~~ 121mm.

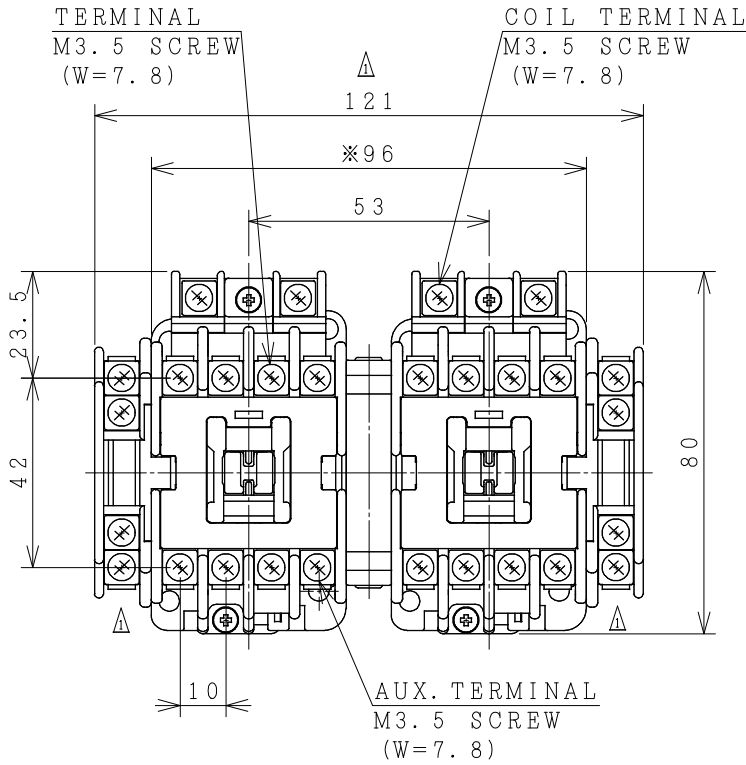


OUTLINE DIMENSIONS.

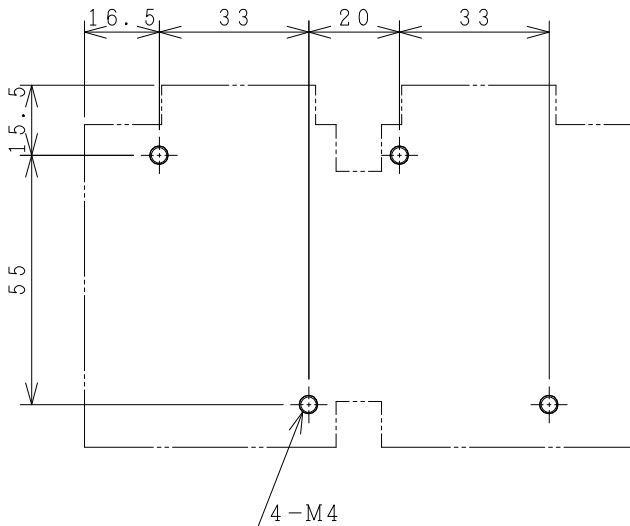


MOUNTING HOLES.

*IN CASE OF ADD AUX. CONTACT SIDE ON UNIT.

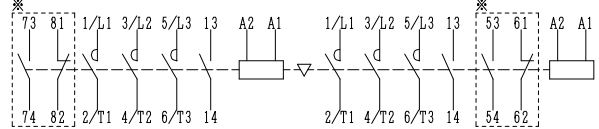

AUX. CONTACTS : 1 a

*IN CASE OF ADD AUX. CONTACT SIDE ON UNIT.

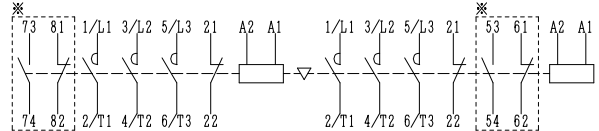

AUX. CONTACTS : 1 b
CONTACTS ARRANGEMENT.

(Reference 43068964R00).

*REMARK

-DIMENSION UNIT = Millimeter (mm).

- (a) =AUX. CONTACT NORMALLY OPENED.

- (b) =AUX. CONTACT NORMALLY CLOSED.

(W=) : WIDTH OF TERMINAL.

DWN.	O. SITTICHAJ	28/06/16	PROJECTION	TITLE	DIMENSION OF HS10-RG
CHKD.	J. JANDER		SCALE		
APPD.	C. KIATTISAK		NTS.		
HITT WORKS DWG. No.					REV.
 Hitachi Industrial Technology (Thailand), Ltd.					01
					4HTN000790
					01
					01