
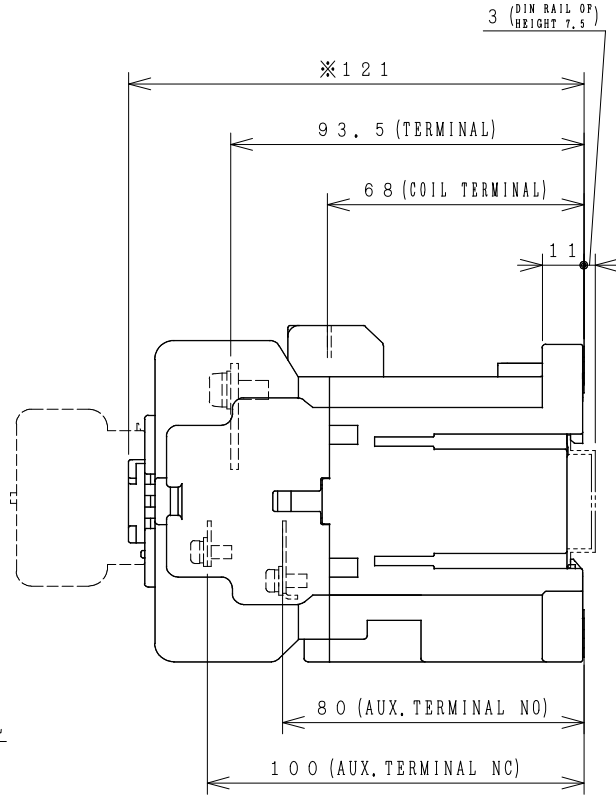


HITACHI ELECTROMAGNETIC CONTACTOR


Type	Rated insulation voltage (Ui)	Max. rated capacity of motor			Rated thermal current (AC1 = Ith)	Applicable standard	Aux. Contact	Weight
		240V	15kW	50A				
HS50-G	AC 690 V	440V	22kW	50A	70 A	IEC 60947-4-1	2a2b	0.96 kg
		240V	15kW	50A				

※WITH AUX. CONTACT SIDE ON UNIT = 102mm.


※WITH AUX. CONTACT HAED ON UNIT = 152mm.

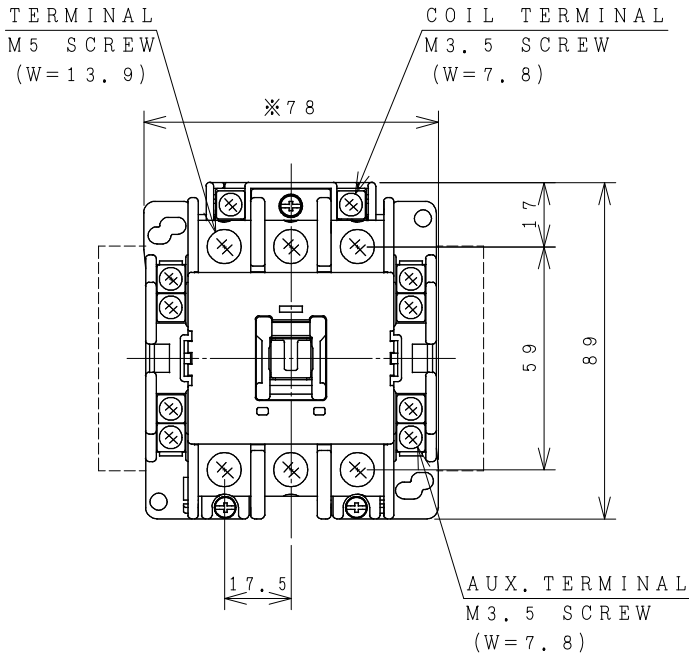

OUTLINE DIMENSIONS.

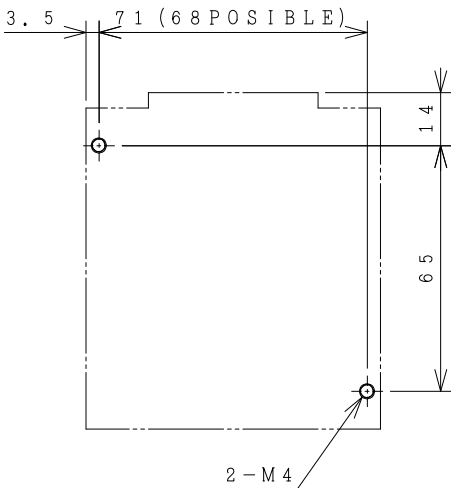

MOUNTING HOLES.

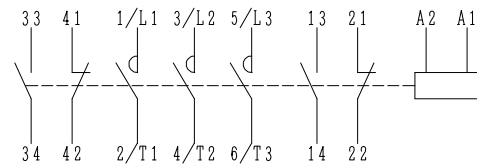

AUX. CONTACTS : 2 a 2 b
CONTACTS ARRANGEMENT.

(Reference 43068171R01).

※REMARK

- DIMENSION UNIT = Millimeter (mm).
- (a) = AUX. CONTACT NORMALLY OPENED.
- (b) = AUX. CONTACT NORMALLY CLOSED.

DWN. O. SITTICHAJ	20/08/16	PROJECTION	TITLE
CHKD. <i>C. Kiatissak</i>		SCALE	DIMENSION OF HS50-G
APPD. <i>T. Kiatissak</i>		NTS.	
HITACHI Hitachi Industrial Technology (Thailand), Ltd.			HITT WORKS DWG. No.
			4HTN000836
			REV.
			00
			SH.
			01
			01

(60~) 65 x 70

(64~) 68 x 67

ALSO POSSIBLE.

(W=) : WIDTH OF TERMINAL.