
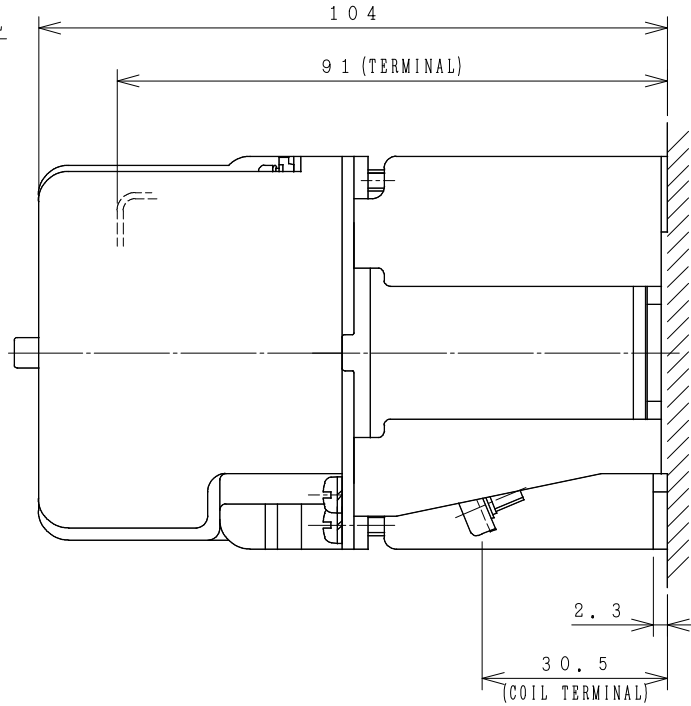


HITACHI CONTACTOR RELAYS


Type	Rated insulation voltage (Ui)	Rate Current (AC15)		Rated thermal current (Ith)	Applicable standard	Aux. Contact	Weight
X5-G (X5-GW)	AC 660 V	240V	3 (2) A	15 (10) A	IEC 60947-5-1	5a, 4a1b 3a2b, 2a3b	0.57 kg
		440V	2 (1) A				

(X5-GW) IN THE CASE OF TWIN CONTACTS TYPE.

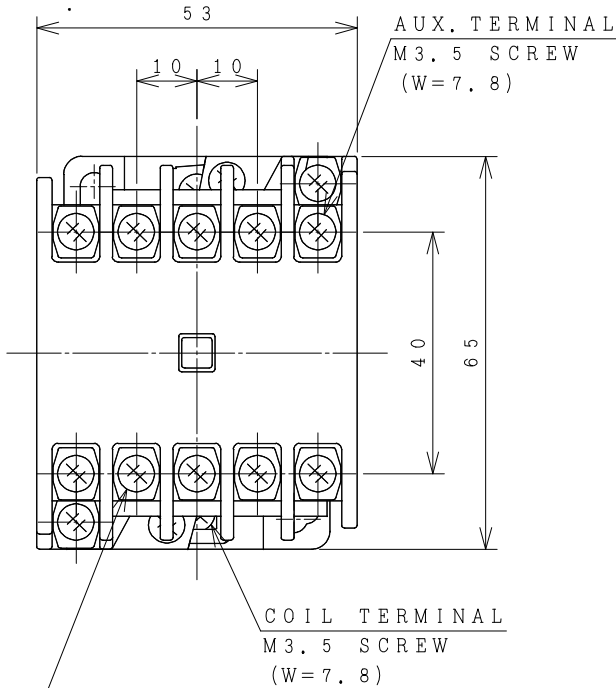


OUTLINE DIMENSIONS.

TERMINAL
M3.5 SCREW
(W=7.8)

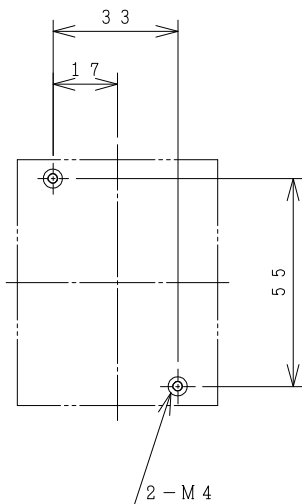


MOUNTING HOLES.

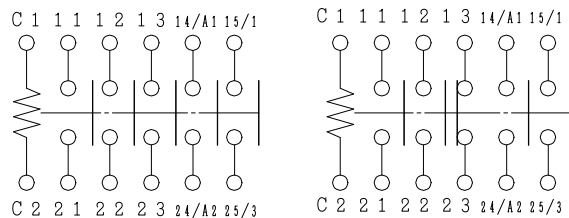

5 a.

4 a 1 b.

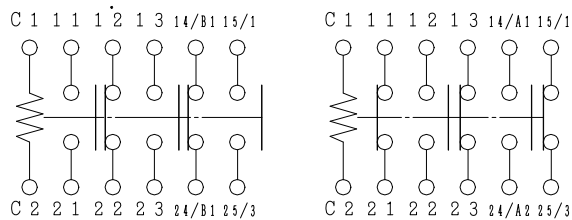

3 a 2 b.

2 a 3 b.

CONTACTS ARRANGEMENT.

(Reference 43044915R01).

※REMARK

- DIMENSION UNIT = Millimeter (mm).

- (a) = AUX. CONTACT NORMALLY OPENED.

- (b) = AUX. CONTACT NORMALLY CLOSED.

BWN.	C. JERRANAN	12/09/16	PROJECTION	TITLE	DIMENSION OF X5-G, X5-GW
CHKD.	<i>C. Kiatissak</i>		SCALE		
APPD.	<i>T. Kiatissak</i>		NTS.		
HITT WORKS DWG. No.					REV.
HITACHI Hitachi Industrial Technology (Thailand), Ltd.					00
					01
					01

34 x 48
34 x 52
35 x 50

ALSO POSSIBLE.

(W=) : WIDTH OF TERMINAL.

4HTN000953