
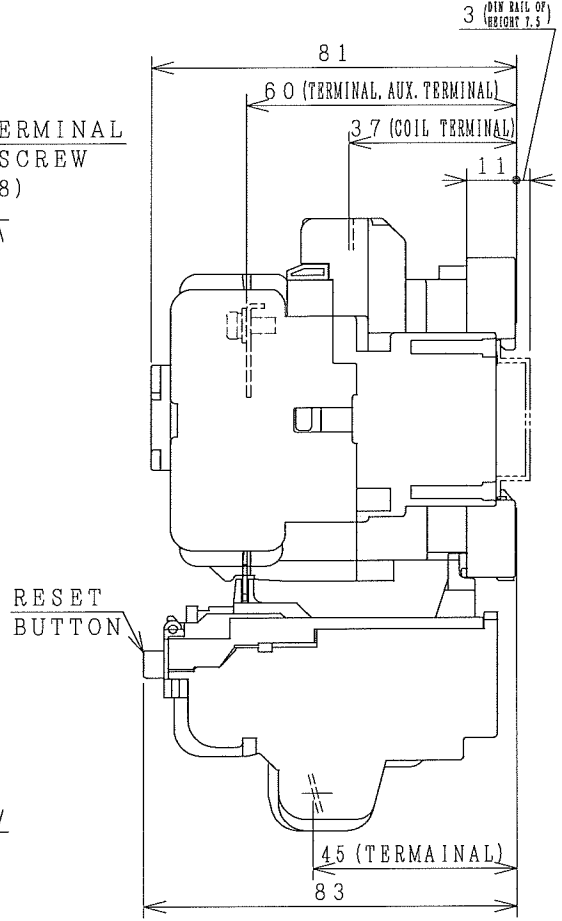



HITACHI ELECTROMAGNETIC SWITCH

Type	Rated insulation voltage (Ui)	Max. rated capacity of motor			Rated thermal current (AC1 = Ith)	Applicable standard	Aux. Contact	Weight
		240V	4.5kW	18A				
HS19-RT	AC 690 V	240V	4.5kW	18A	20 A	IEC 60947-4-1	1a1b x 2 OR 2a x 2 OR 2b x 2	0.90 kg
HS19-RTK		440V	7.5kW	18A				


※WITH AUX. CONTACT SIDE ON UNIT = 142mm.

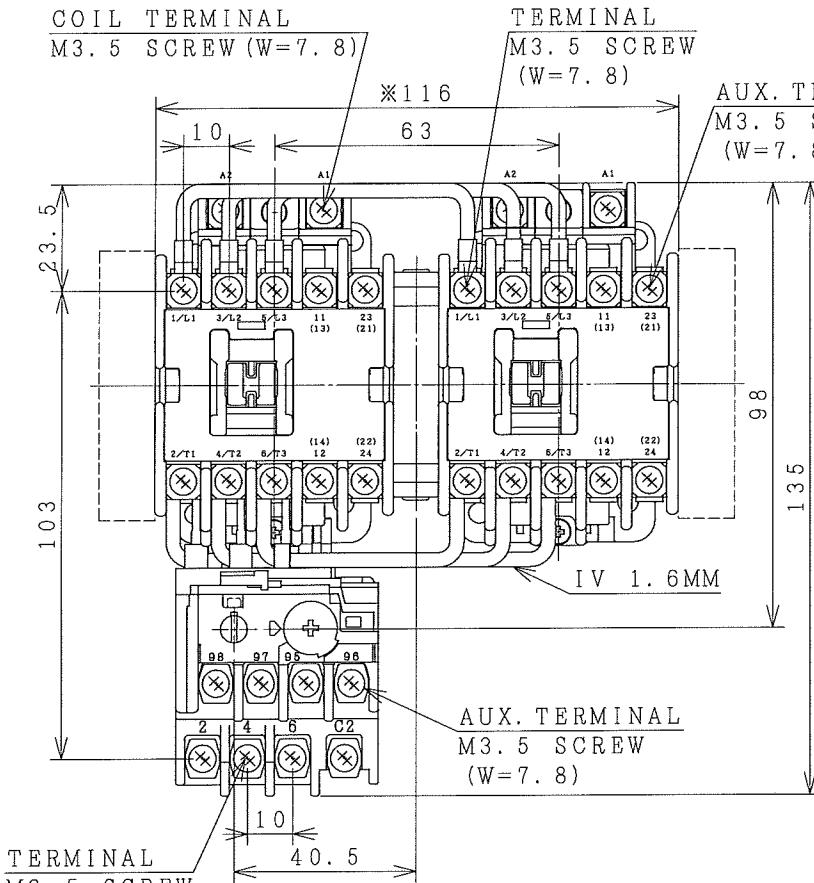

OUTLINE DIMENSIONS.

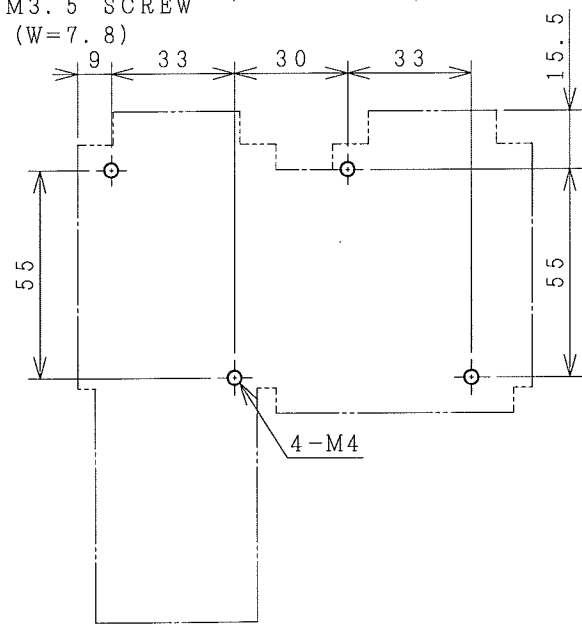

MOUNTING HOLES.

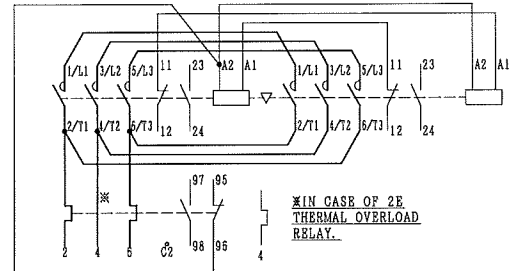

AUX. CONTACTS: 1a1b x 2 CONTACTS ARRANGEMENT.

- ※REMARK
 - DIMENSION UNIT = Millimeter (mm).
 - (a) = AUX. CONTACT NORMALLY OPENED.
 - (b) = AUX. CONTACT NORMALLY CLOSED.

DWN. O. SITTICHAI	27/07/18	PROJECTION	TITLE
CHKD. J. Jirada	S	SCALE NTS.	DIMENSION OF HS19-RT, RTK
APPD. S. Sugai			
HITACHI Hitachi Industrial Technology (Thailand), Ltd.			HITT WORKS DWG. No. 4HTN001153
			REV. 00 SH. 01 01

(W=) : WIDTH OF TERMINAL.